

崧盛电  
LED DRIVER

# SOSEN LED Driver, Your Smart Choice

**SS-240GA LED**

:SS-240GA-56\*

: 240W LED

: V05

: 2021-09-16

**崧盛电源**  
LED DRIVER



**LED DRIVER**

**GA**



- 93%
- 1-10V 10-0V/5-0V , PWM
- IP67
- / / /
- : 10kV/ 6kV
- 5



**CB CE IP67**

SS-240GA	240W	LED	LED	LED
----------	------	-----	-----	-----

型号	输入电压	最大输出功率	输出电压范围	推荐工作电压	输出电流	纹波系数 (%)	效率 (%)	功率因数	PF
SS-240GA-56*	220-240Vac	240W	22-56V	36-56V	3.3-6.7A	8%	0.98	93%	90

1. 220Vac , 25 ;
2. LED

LED

240Vac

⊞

300Vrt A ê

7

6

0.96

Bg

240Vac/50Hz 70-100%

220Vac/50Hz

220-240Vac/50Hz 70-100%

86-755-29358800

---

--	--	--	--	--











			3000Vac	
			1000Vac	
			3000Vac	
			500Vac 1000Vac	
			0000Vac	
			500Vac @ C	cR <sub>1</sub> : ~Y <sub>0</sub> i
	10M			000V

- 1. EMC
  - 2. LN
  - 3. CCC
- EMC
- IEC 60598-1:2014 10.2 " "

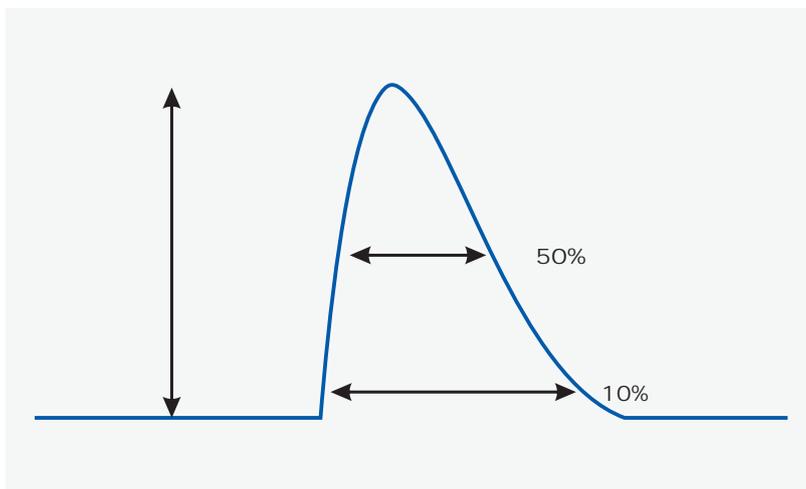


		T (@ 10%)	T (@ 50%)
220Vac	120A		200uS
277Vac	150A	500uS	

Vs. ( /AOC )

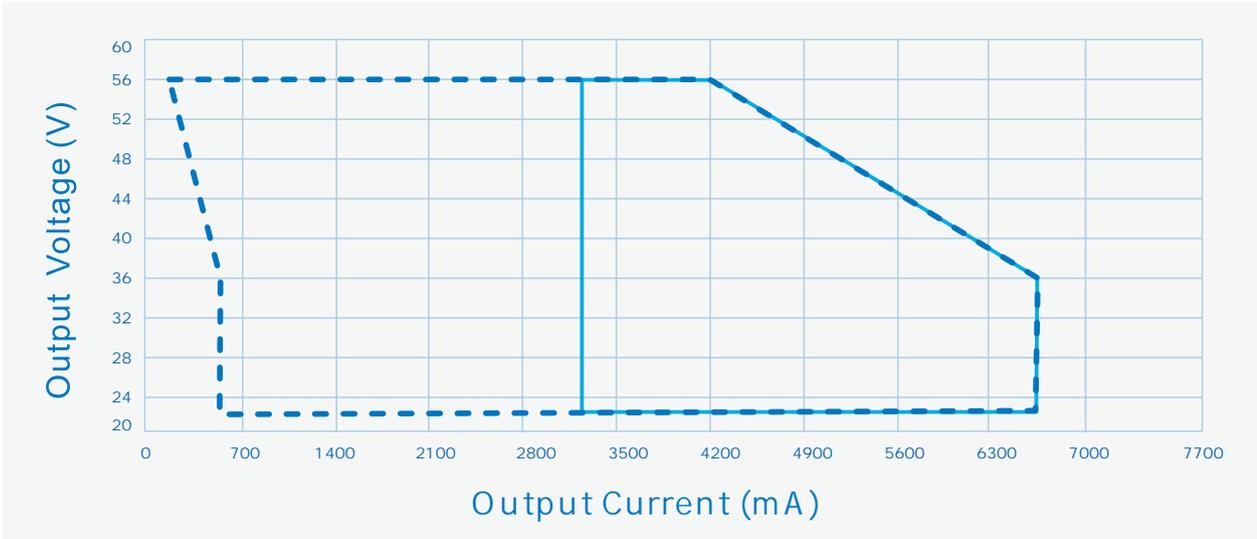

----- Dimming Window      ————— AOC Window

Vs. (Vin= 220Vac)

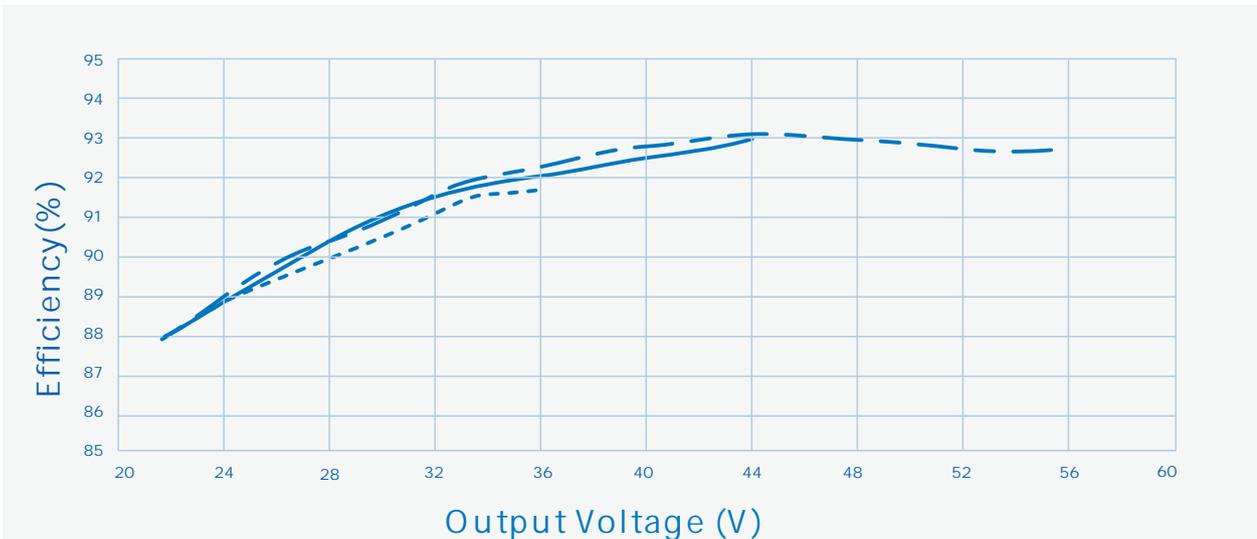


..... Io = 6700mA      ————— Io = 5500mA      - . - . - Io = 4300mA






Vs.

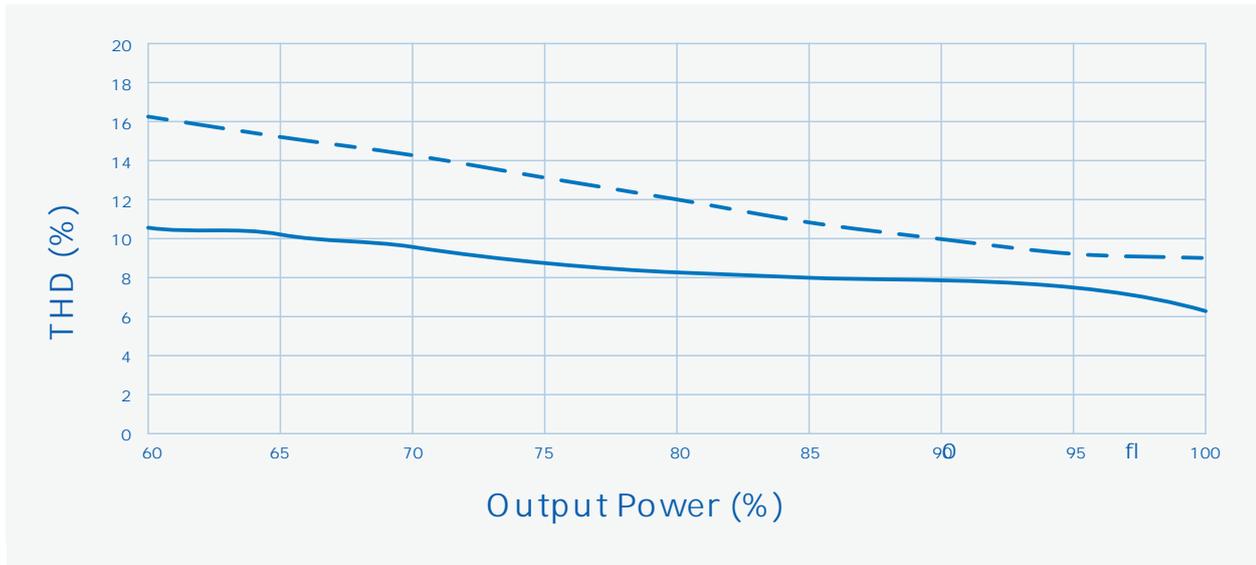

———— Vin=220Vac

- - - - - Vin=277Vac

0 Vs.

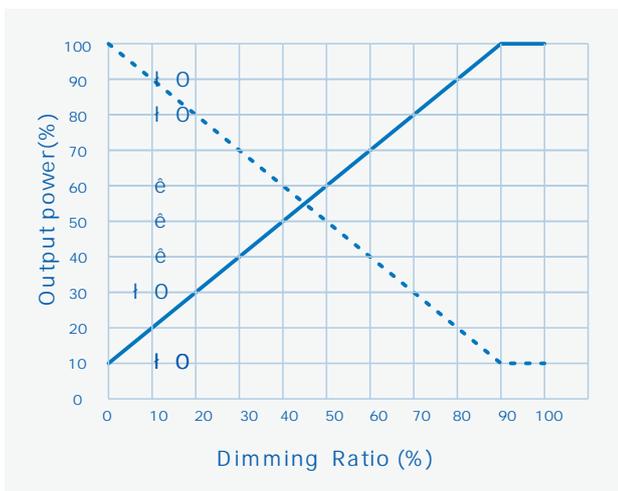


———— 1-10V, PWM, Resistor

..... 10-0V

Vs.

5-0V





SS

N



V-



1 , , 704

2

- mm × × = 495× 385× 162;

- 14

- 1.1kg 16.4kg

-

GB 3873 83

1



V00		2018/10/18	
V01	450mm	2019/07/20	
V02		2020/06/02	
V03	10-0V	2020/11/10	
V04		2021/07/02	
V05	5-0V	2021/09/16	

