



# 80CNL LED Driver, Smart Choice

80CNL-E(64) LED

SS-80CNL-E260\*

DOWN LED

W03

: 2023-11-15

BUCCN

LED

崧盛电  
LED DRIVER

LED DR

80W

86-755-29358816

www.sosen.com

SH

" \* "

" * "	DALI ( :D)	AUX 12V ( :H)	0-10V/PWM/Resistor	1-10V/PWM /Resistor ( :B)	
B				✓	
BH		✓	✓		
D	✓				



	120Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			0.8A	120Vac
			95W	120Vac
(120Vac)			60A	
(220Vac)			100A	
(277Vac)			130A	
			0.5W	220Vac/50Hz (BH/D )
	0.95	0.97		220Vac/50Hz
	0.90			120-277Vac/50Hz 70-100%
		9%	12%	220Vac/50Hz
			20%	120-277Vac/50Hz 70-100%



	180V		260V	180-200V
	200V		260V	$P_o = V_o * I_o = 80W$
	0.308A		0.4A	0.4A 200V, 0.308A 260V
AOC	0.28A		0.4A	
			310V	
@ 120Vac	89.0%	91.0%		260V/0.308A
@ 220Vac	92.0%	94.0%		260V/0.308A
@ 277Vac	92.0%	94.0%		260V/0.308A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			1.0S	120Vac
			0.5S	220Vac
			0.75S	220Vac, DALI-2
	-2.5%		+2.5%	
	-3%		+3%	200V-260V
	-0.03% /		+0.03% /	0 90
	90	100	110	>Tc Typ. <Tc Min.
				DALI-2






120Vac	60A	520uS	
220Vac	100A		200uS
277Vac	130A	520uS	







Vs. (Vin=220Vac)

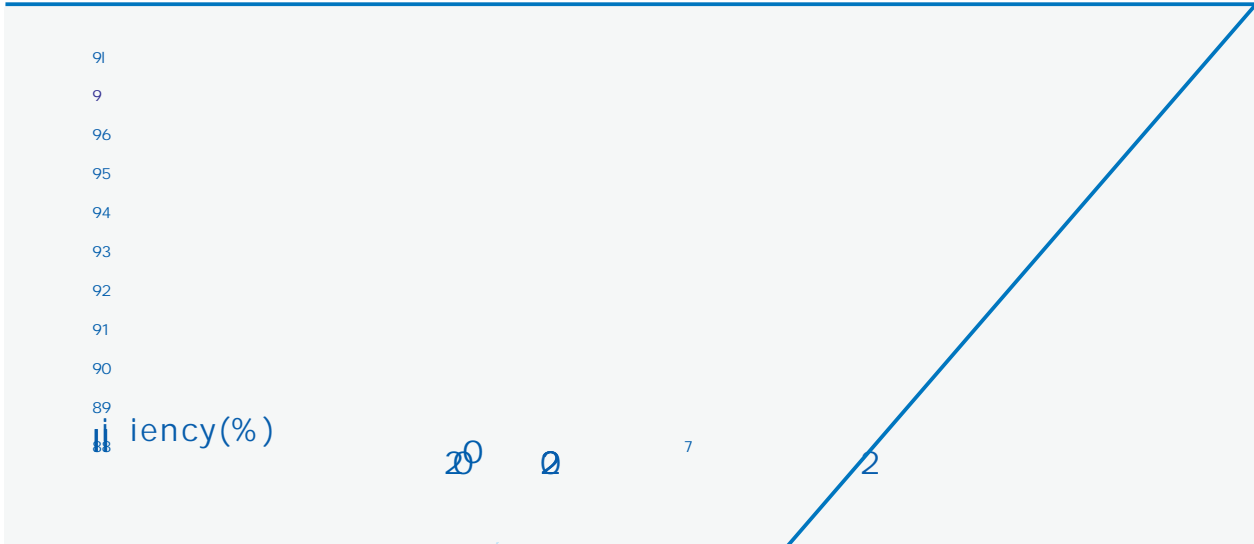


Vs. (Vin=277Vac)







Vs.

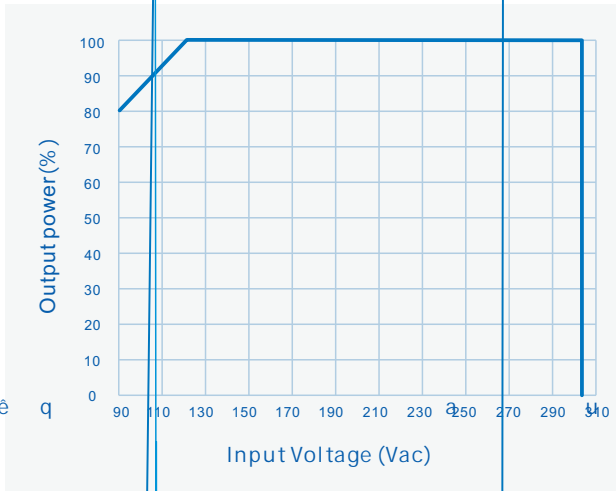

Vs.

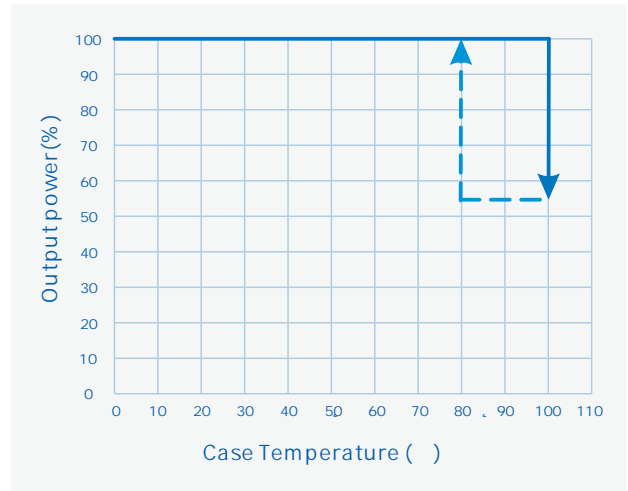

Vs.

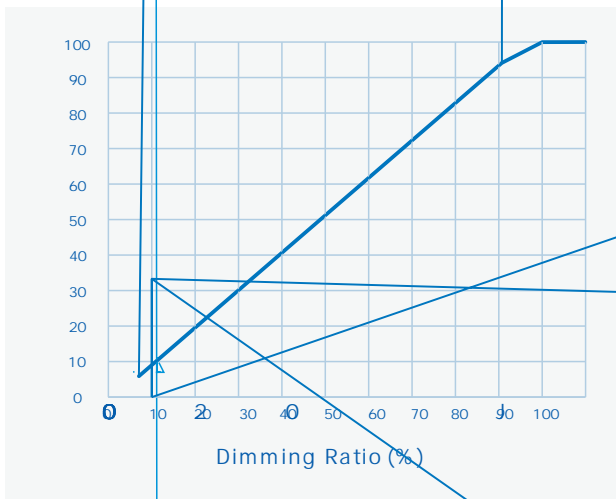

Vs.

— BH Type      - - - - B Type







1					704
2					
3			5mm		
4、	LED+	LED-		1.8mm	
5、					
6、	LED				
7	LED				
8			LED		

-		mm	×	×	=495× 385× 162;
-		9			
-	0.705kg			7.7kg	
-					

--	--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------





V00		2023/01/04	
V01		2023/04/14	
V02		2023/05/06	
V03		2023/11/15	

