

规格书


SS-35EUH系列 开关电源

: SS-35EUH-XX

: 35W

: V00

: 2022-08-08

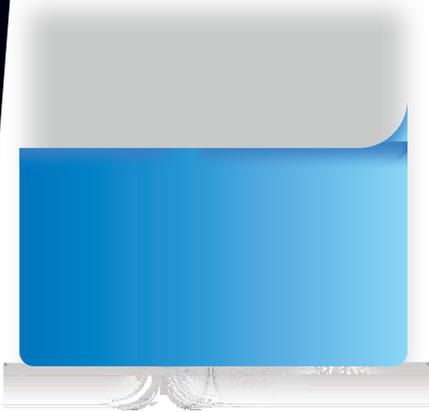

产品特性：

■

全方位保护：短路/ /过
100%

300Vac 5

LED

70

5G

1U

质保3年

< 0.3W



SS-35EUH

输入性能：

参数	最小值	典型值	最大值	备注
	100Vac		240Vac	
	120Vdc		373Vdc	
	85Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			0.8A	100Vac
			0.5A	230Vac
(115Vac)			40A	冷机启动
(230Vac)			60A	冷机启动
			0.3W	230Vac/50Hz

输出性能(SS-35EUH-12) :

参数	最小值	典型值	最大值	备注
		12V		
空	10.2V		13.8V	
			3A	
			36W	
	86.0%	87.0%		@ 230Vac
	84.0%	85.0%		@ 115Vac
	-1%		+1%	
PK-PK			120mVp-p	20MHz
	-0.5%		+0.5%	
	-0.5%		+0.5%	0% 100%
			10%	
	-10%		+10%	10% - 50%, 230Vac 100% - 50%, 230Vac
		0.5S	1S	@ 230Vac
		120mS		@ 230Vac
		30mS		@ 230Vac
	14V	14.5V	16V	







SS-35EUH

输出性能(SS-35EUH-48) :

参数	最小值	典型值	最大值	备注
		48V		
空	43.2V		52.8V	
			0.75A	
			36W	
	89.0%	90.0%		@ 230Vac
	87.0%	88.0%		@ 115Vac
	-1%		+1%	
PK-PK			200mVp-p	20MHz
	-0.5%		+0.5%	
	-0.5%		+0.5%	0% 100%
			10%	
	-10%		+10%	10% -50% 100% -50%
		0.5S	1S	@ 230Vac
		120mS		@ 230Vac
		30mS		@ 230Vac
	53V	58V	62V	

环境要求：




安规测试项目：

安规测试项目	技术指标	备注
	3750Vac	10mA/60s
	2000Vac	10mA/60s
	1250Vac	10mA/60s
	100MΩ	500Vdc
	0.1Ω	25A/1min
	0.75mA	240Vac
	BS EN /EN 55032	Class B
	BS EN /EN 55032	Class B

1. LN

特性曲线：

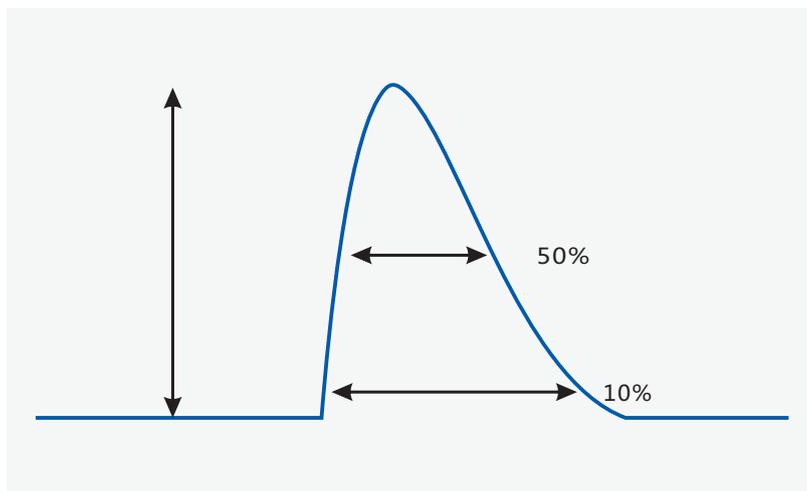


		T(@ 10%)	T(@ 50%)
115Vac	40A	2000uS	
230Vac	60A		750uS


SS-35EUH

特性曲线：

Vs.

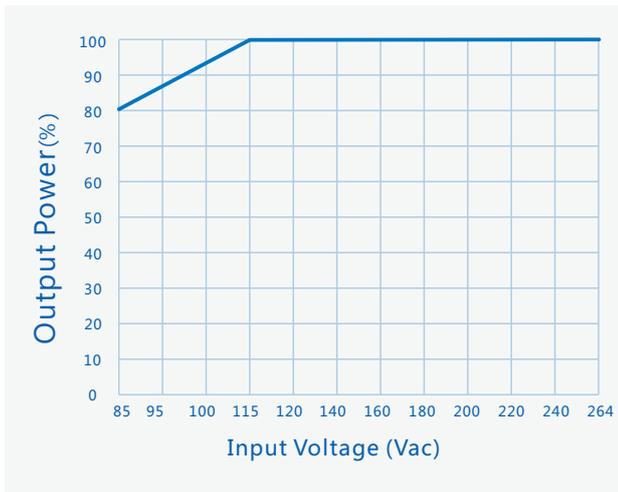

Vs.

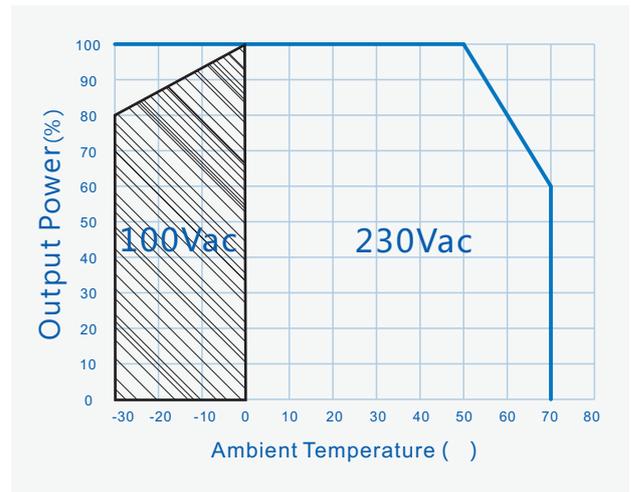

结构尺寸特性 (单位 : mm)



变更履历表



V00		2022/08/08	

