

规格书

SS-75EUH系列 开关电源

: SS-75EUH-XX

: 75W

: V00

: 2022-09-05



产品特性：

-
-
- 全方位保护：短路/ /过
- 100%
- 300Vac 5
- LED
- 70
- 5G
- 1U
- 质保3年
- < 0.3W

型号



SS-75EUH

输入性能：

参数	最小值	典型值	最大值	备注
	100Vac		240Vac	
	120Vdc		373Vdc	
	85Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			2A	100Vac
			1A	230Vac
(115Vac)			40A	25 冷机启动
(230Vac)			60A	25 冷机启动
			0.3W	230Vac/50Hz

SS-75EUH

输出性能(SS-75EUH-12) :

参数	最小值	典型值	最大值	备注
		12V		
		12V		,50%
空	10.2V		13.8V	
			6A	
			72W	
	86.0%	88.0%		@ 230Vac
	84.0%	85.0%		@ 115Vac
	-1%		+1%	
	-0.5%		+0.5%	
	-0.5%		+0.5%	
+ PK-PK			120mVp-p	
			10%	
	-5%		+5%	
			200uS	
		0.5S	1S	@ 230Vac
		120mS		@ 230Vac
		30mS		@ 230Vac
	14V	14.5V	16V	





其他性能：



SS-75EUH

环境要求：

参数	最小值	典型值	最大值	备注
Ta	-30	25	+70	
	-40	25	+85	
	20%RH		90%RH	
	10%RH		95%RH	
		2000m		

安规标准：


认证	安规标准	认证状况	备注
UL/cUL	UL60950-1		
CCC	GB 4943.1-2011		

安规测试项目：

安规测试项目	技术指标	备注
	3750Vac	10mA/60s
	2000Vac	10mA/60s
	1250Vac	10mA/60s
	100MΩ	500Vdc
	0.1Ω	25A/1min
	0.75mA	240Vac
	BS EN /EN 55032	Class B
	BS EN /EN 55032	Class B

1. LN


特性曲线：

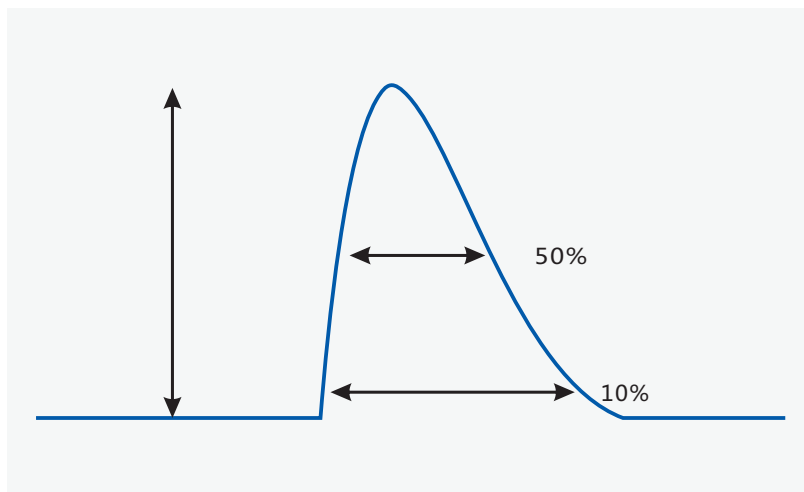


		T(@ 10%)	T(@ 50%)
115Vac	40A	2000uS	
230Vac	60A		750uS

特性曲线：

Vs.

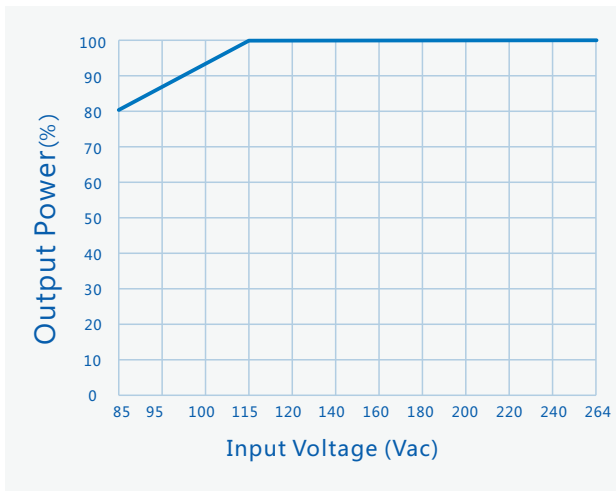

Vs.

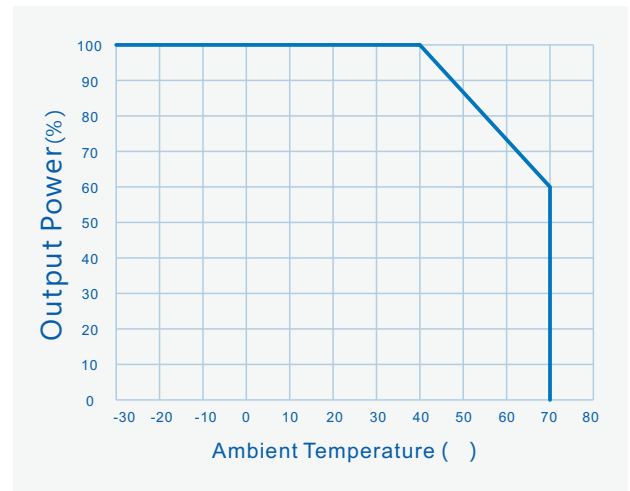

变更履历表



V00		2022/09/05	