

THE
ED DR

E
S

SS-0
LED

: 2023-07

SS-200CA LED

" * "

" * "	DALI (D)	AUX 12V (H)	Timing (T)	0-10V/PWM /Resistor (B)	
BH		✓		✓	
DH	✓	✓			

--	--	--	--	--

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			2.4A	100Vac
			240W	100Vac
(120Vac)			60A	
(220Vac)			100A	冷机启动
(277Vac)			130A	冷机启动
			0.5W	220Vac/50Hz , STB
	0.95	0.97		220Vac/50Hz , 满载
	0.90			100-277Vac/50Hz , 70-100%载
		7%	10%	220Vac/50Hz , 满载
			20%	100-277Vac/50Hz , 70-100%载



	28V		56V	28-36V
	36V		56V	$P_o = V_o * I_o = 200W$
	3.6A		5.6A	5.6A 36V, 3.6A 56V
AOC	2.8A		5.6A	
	3.11A		5.6A	DALI-2
			60V	
@ 120Vac	89.0%	90.0%		43V/4.65A
@ 220Vac	91.0%	92.0%		43V/4.65A
@ 277Vac	91.0%	92.0%		43V/4.65A
	-5%		+5%	
PK-AV		5%	10%	
			10%	
			0.5S	120Vac
			0.5S	220Vac
			0.7S	230Vac DALI-2
	-2%		+2%	
	-2%		+2%	
	-0.03%/		+0.03%/	0 90
	90	100	110	> Tc Typ., < Tc Min.,
			10W	
			0.5W	DALI-2



SS-200CA LED



AUX	10.5V	12V	13.5V	200mA
	0V		12V	300mA
0-10V	10%Iomax		100%Ioset	
	0V		10V	
PWM				

MTBF	201,200 hours	220Vac, 25 (MIL-HDBK-217F)
	IP65	
	90 3mm	
	5	73
	1500g	
	151mm*71.5mm	x

Tcase	-40	25	+90	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	

UL/cUL	UL8750	✓	
ENEC	EN 61347-1:2015 EN 61347-2-13:2014 EN 61347-2-13:2014/A1:2017	✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	

EMI/EMS	/	
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	EN55015:2013+A1:2015 FCC Part 15 Subpart B; ANSI C63.4:2014	Class B
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5;ANSI/C82.77-5-2017	B (6kV, 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV, 6kV)



SS-200CA

LED


Vs. (/AOC)

Output Voltage

Vs.

(Vin=120Vac)

Efficiency (%)

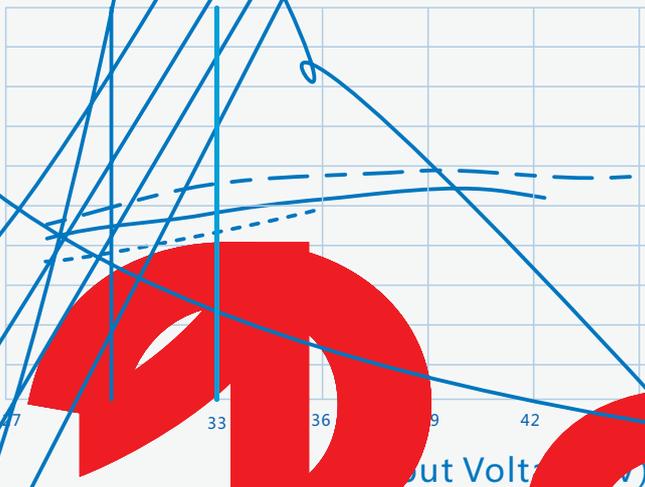


Io=56

Io=50mA


Io=36

Vs. (Vin=220Vac)

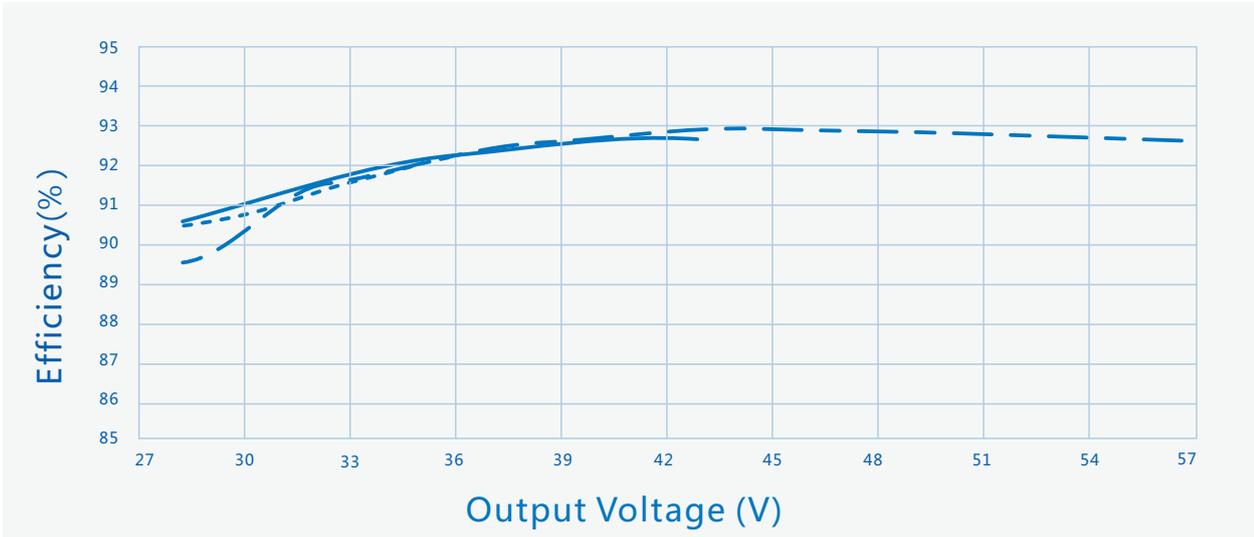

----- Io=5600mA ————— Io=4650mA - - - - Io=3600mA


Vs. (Vin=277Vac)

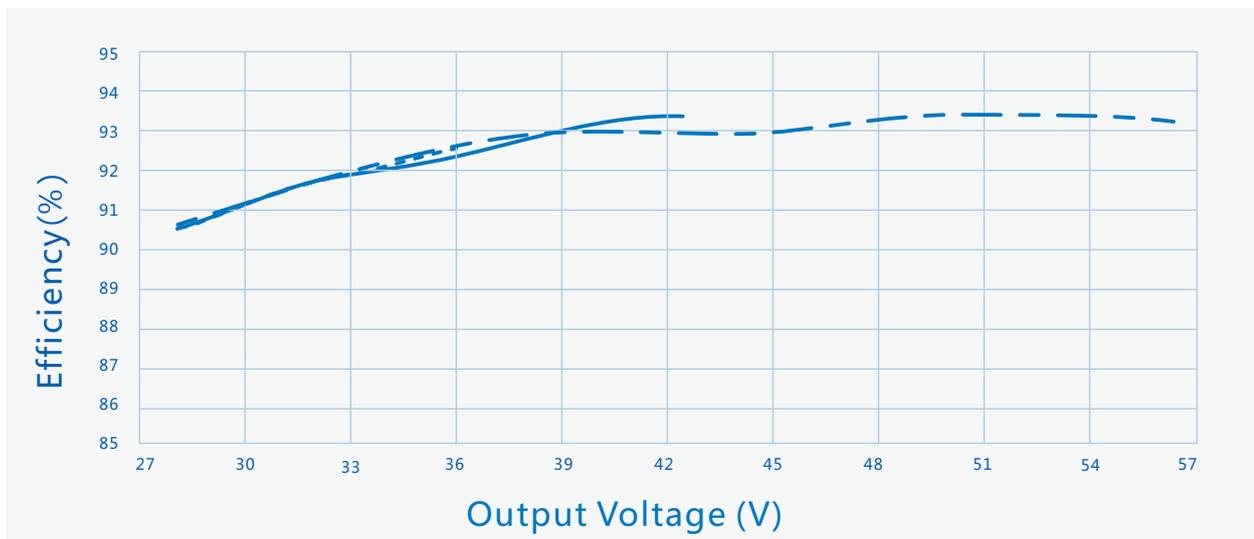

----- Io=5600mA ————— Io=4650mA - - - - Io=3600mA




Vs.

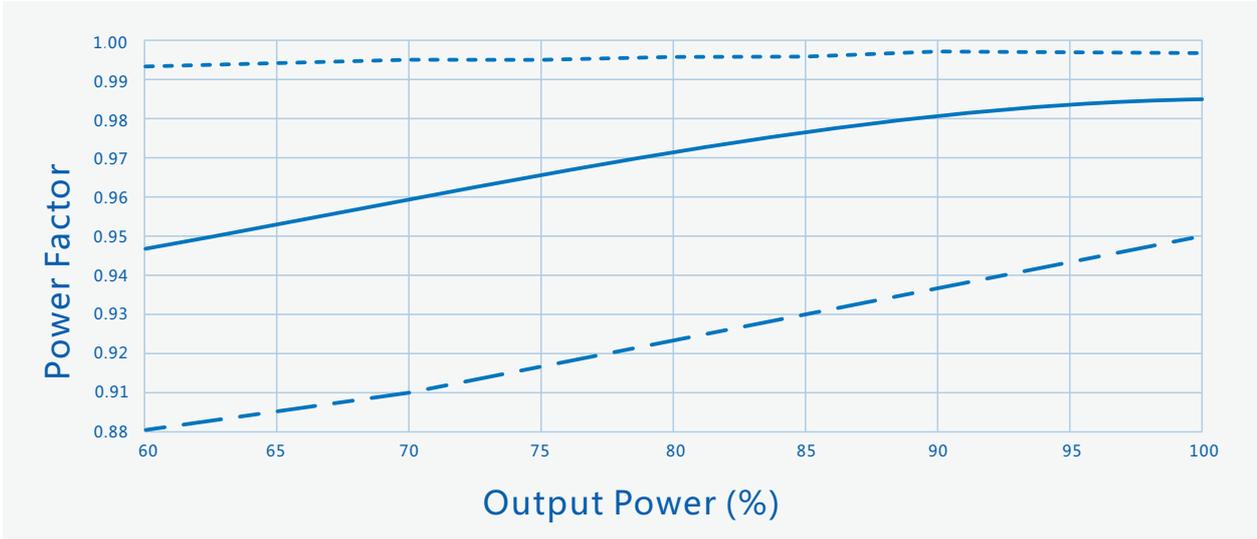

----- Vin=120Vac ————— Vin= 220Vac - - - - Vin=277Vac



Vs.

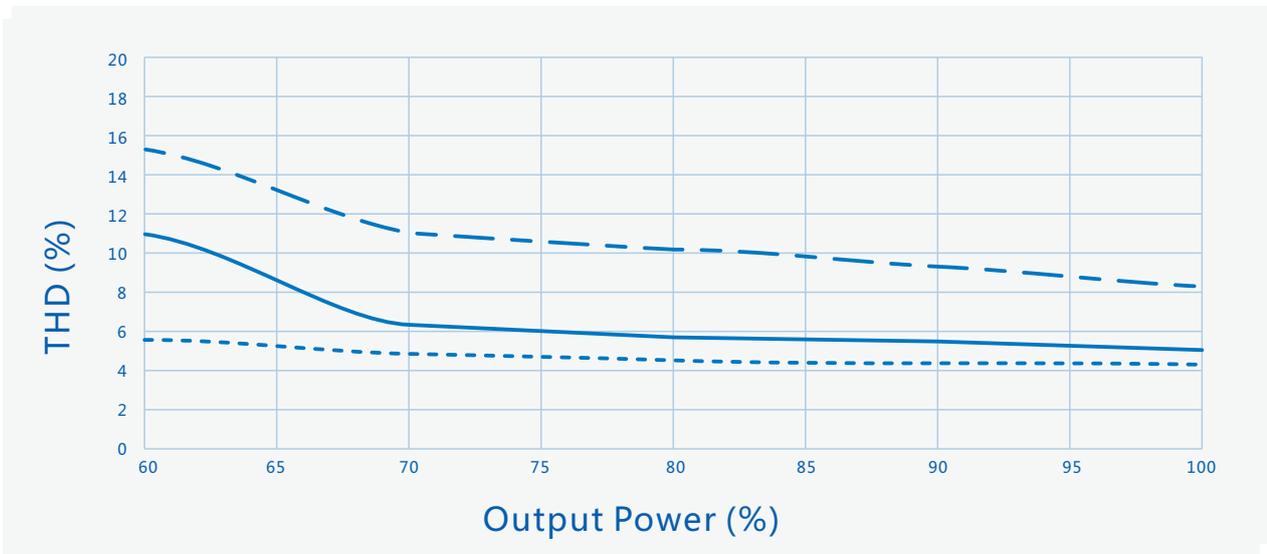

----- Vin=120Vac ————— Vin= 220Vac - - - - Vin=277Vac




CS-200CA LED

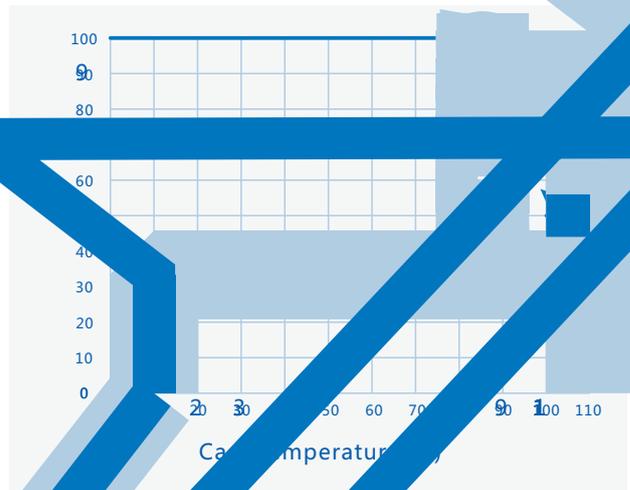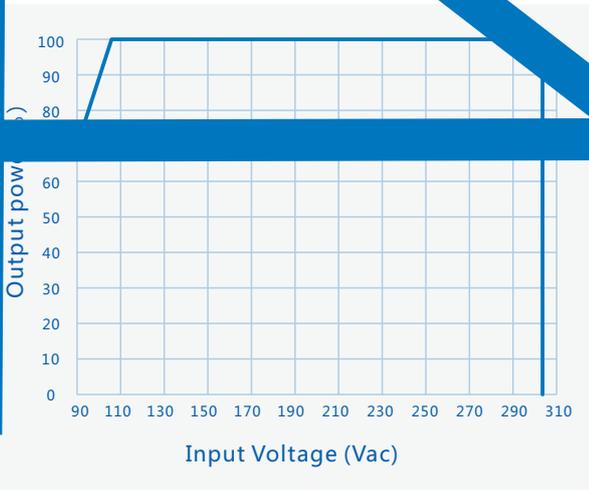

Vs.

Vs.

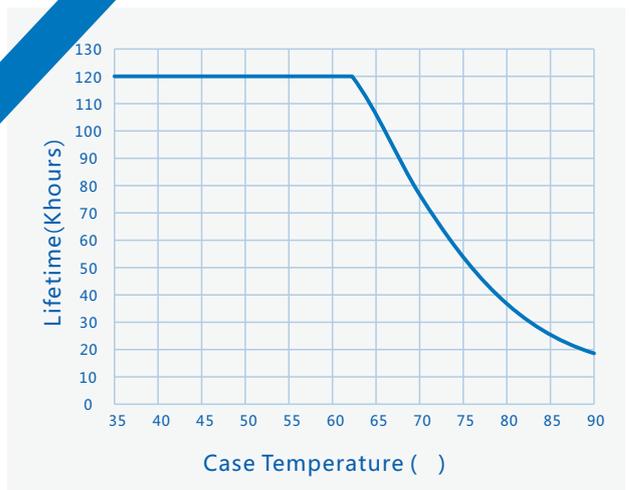





1

704

2

- mm) : × × = 495×385×162;
- 9
- 1.5kg 15kg
-
-

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU)

2015/863/EU





V00		2019/09/17	
V01	CCC	2019/10/29	
V02		2020/04/07	
V03		2020/04/27	
V04		2021/01/19	
V05		2021/07/02	
V06		2021/09/02	
V07		2021/11/11	
V08	DALI-2	2022/01/18	
V09		2022/11/28	
V10		2023/02/01	

