


: SS-240CP-54\*  
: 240W LED  
: V08  
: 2023-02-01





|  |        |  |  |        |
|--|--------|--|--|--------|
|  | 120Vac |  |  |        |
|  | 108Vac |  |  |        |
|  | 47Hz   |  |  |        |
|  |        |  |  | 108Vac |

|          |      |      |     |                           |
|----------|------|------|-----|---------------------------|
| (120Vac) |      |      | 5   |                           |
| (220Vac) |      |      | 95  | 冷机启动                      |
| (277Vac) |      |      | 12  | 冷机启动                      |
|          |      |      | 5W  | 220Vac/50Hz, 空载           |
|          | 0.95 | 0.98 |     | 220Vac/50Hz, 满载           |
|          | 0.90 |      |     | 120-277Vac/50Hz, 70-100%载 |
|          |      | 7%   | 10% | 220Vac/50Hz, 满载           |
|          |      |      | 20% | 120-277Vac/50Hz, 70-100%载 |

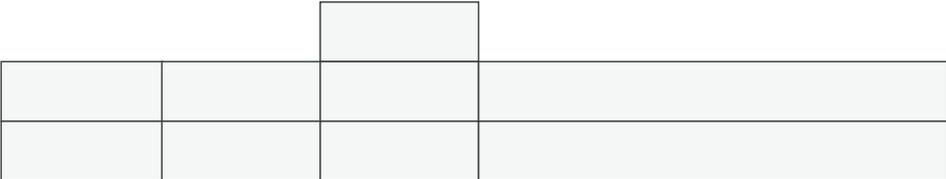

# SS-240CP LED




|       |     |               |  |           |                            |
|-------|-----|---------------|--|-----------|----------------------------|
| 1-10V |     | 0V            |  | 12V       | DIM+ 110uA                 |
|       |     | 10%Iomax      |  | 100%Ioset | DIM+ /DIM-                 |
|       |     | 1V            |  | 10V       |                            |
| PWM   | PWM | 9.8V          |  | 10.2V     | DIM+ 110uA                 |
|       | PWM | 0V            |  | 0.3V      | DIM+ /DIM-                 |
|       | PWM | 1KHz          |  | 2KHz      |                            |
|       | PWM | 10%           |  | 100%      |                            |
|       |     | 10Kohm        |  | 100Kohm   | DIM+ 110uA                 |
|       |     | 10%Iomax      |  | 100%Ioset |                            |
|       | 65  | 100,000 hours |  |           | 80%                        |
|       | 77  | 55,000 hours  |  |           | 80%                        |
| MTBF  |     | 205,000 hours |  |           | 220Vac, 25 (MIL-HDBK-217F) |
|       |     | IP65          |  |           |                            |
|       |     | 85            |  |           |                            |
|       |     | 5             |  |           | 75                         |
|       |     | 1950g         |  |           |                            |
|       |     | 182mm*71.5mm  |  |           | x                          |

25 LED






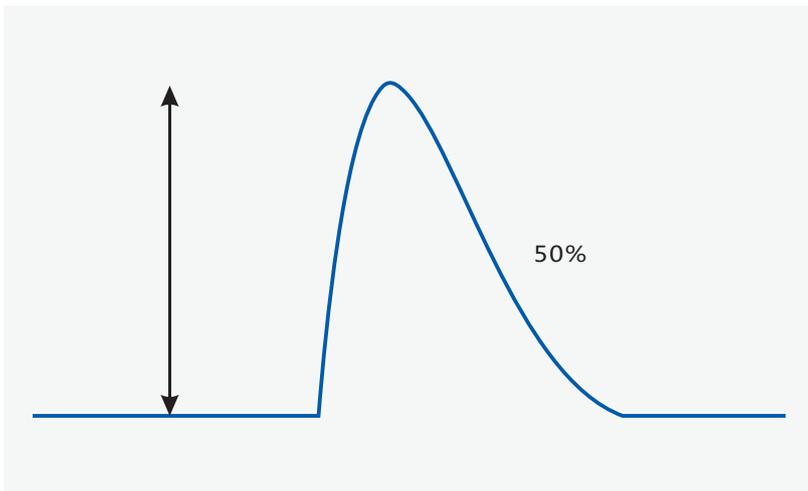

|        |      | T (@ 10%) | T (@ 50%) |
|--------|------|-----------|-----------|
| 120Vac | 50A  | 600uS     |           |
| 220Vac | 95A  |           | 70uS      |
| 250Vac | 125A | 600uS     |           |




Vs. ( /AOC )

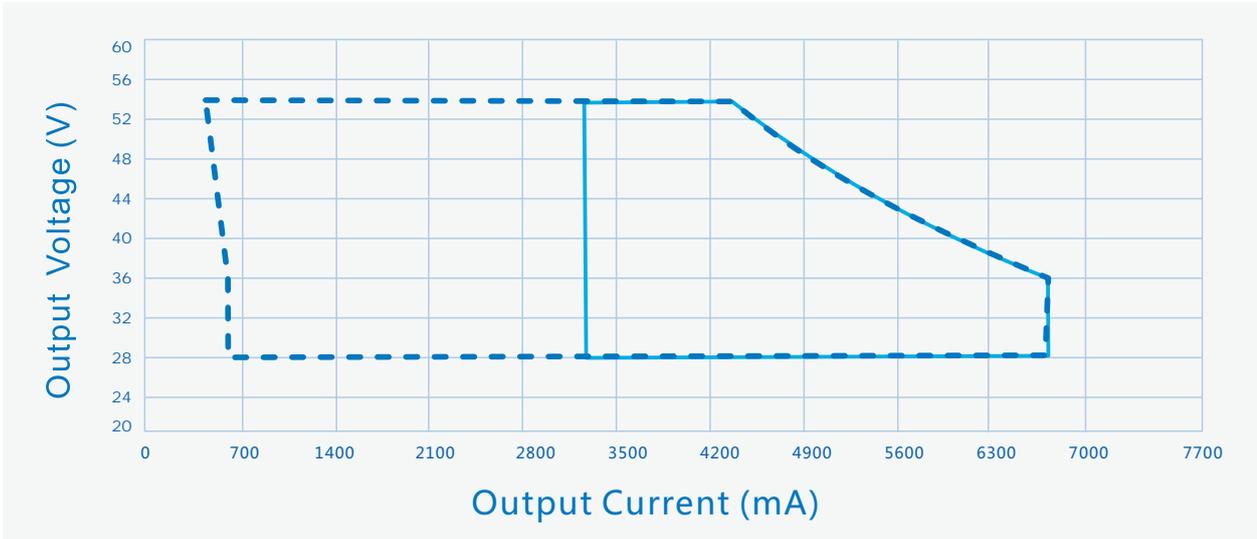


----- Dimming Window      ————— AOC Window

Vs. (Vin=120Vac)

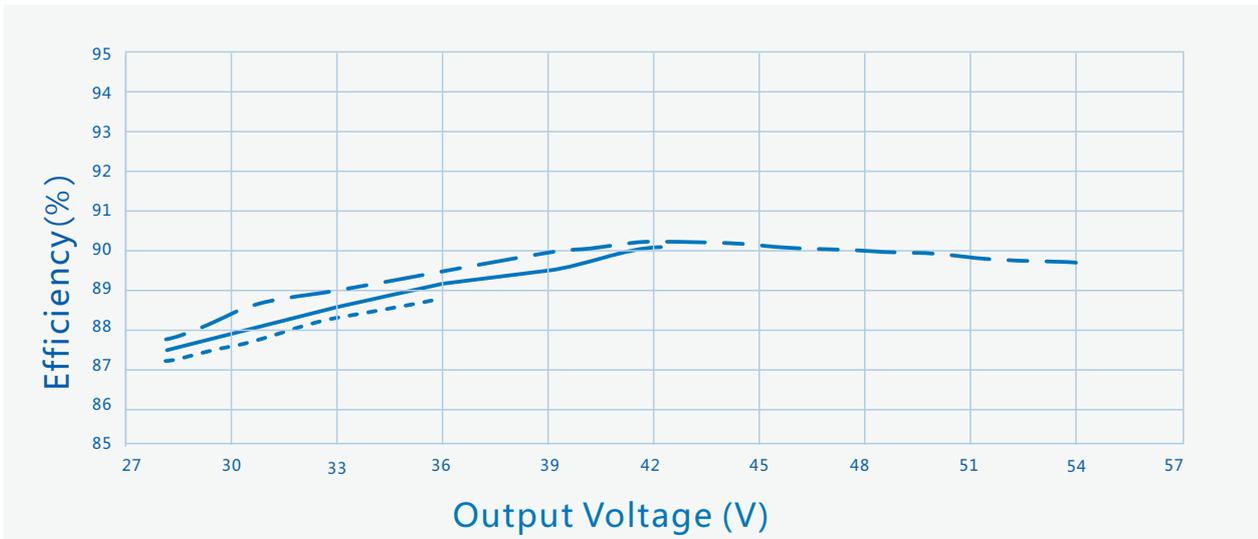


----- Io=6700mA      ————— Io=5550mA      - - - Io=4400mA

Vs. (Vin=220Vac)

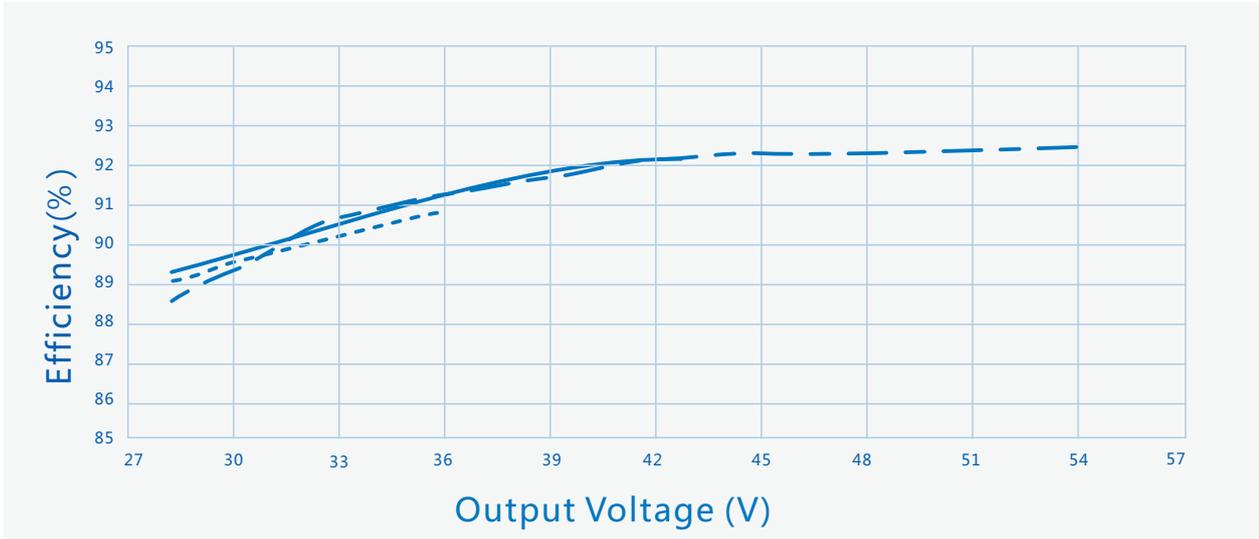

----- Io=6700mA      ————— Io=5550mA      - - - - Io=4400mA


Vs. (Vin=277Vac)

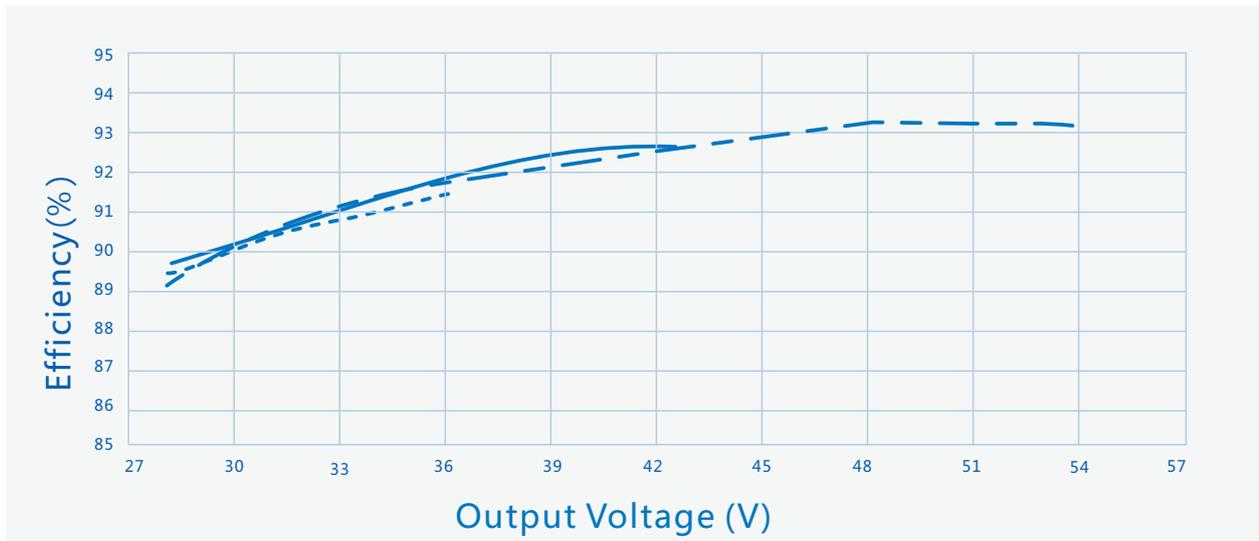

----- Io=6700mA      ————— Io=5550mA      - - - - Io=4400mA




Vs.

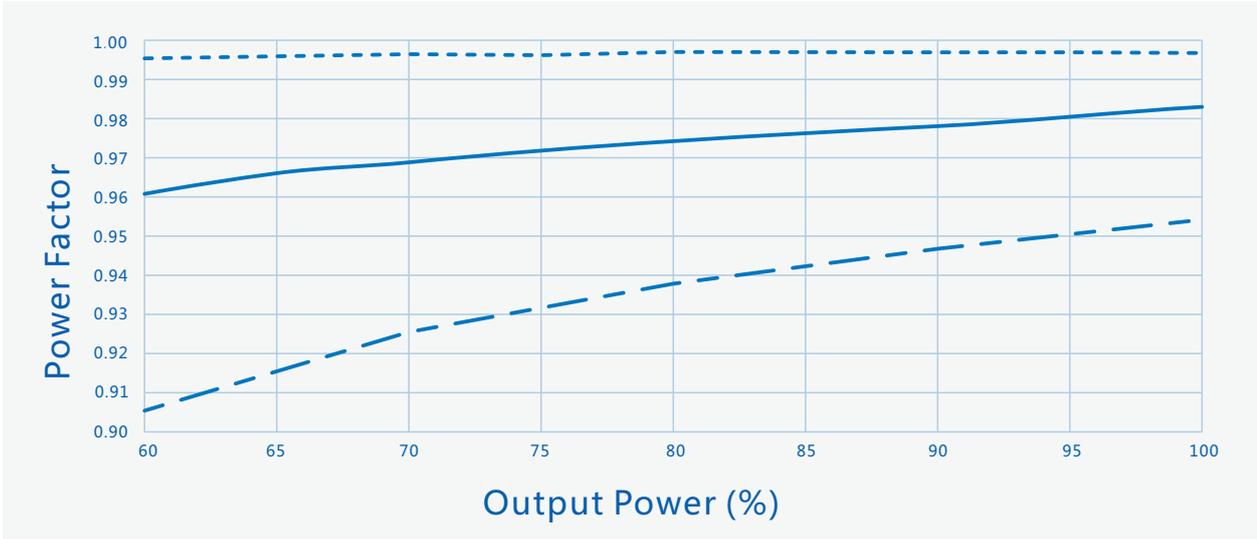

----- Vin=120Vac      ————— Vin= 220Vac      - - - - Vin=277Vac


Vs.

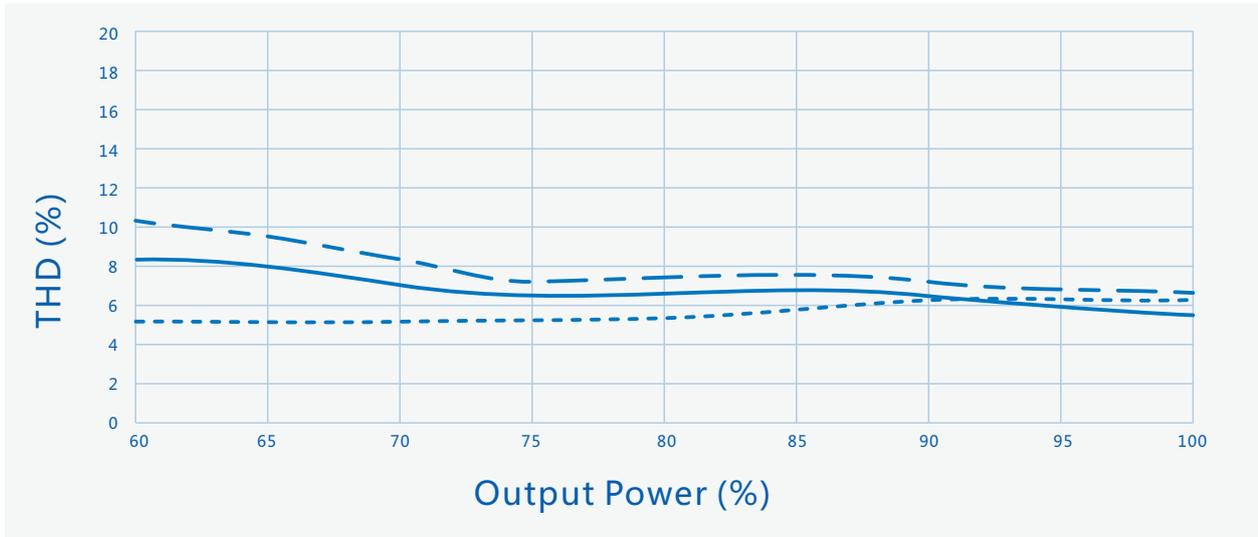


----- Vin=120Vac      ————— Vin= 220Vac      - - - - Vin=277Vac




Vs. ( 60 )

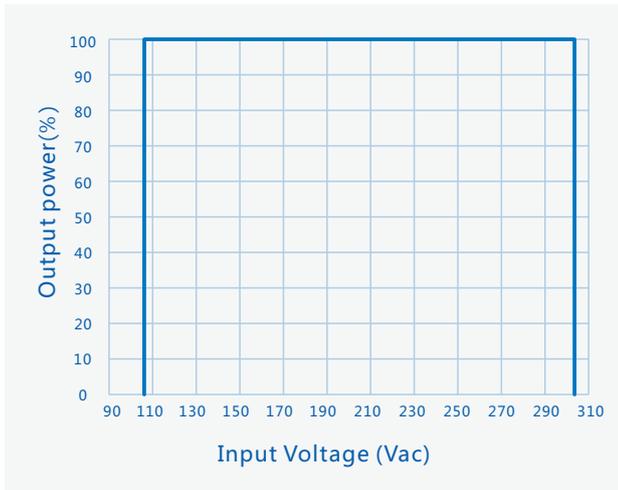


Vs.

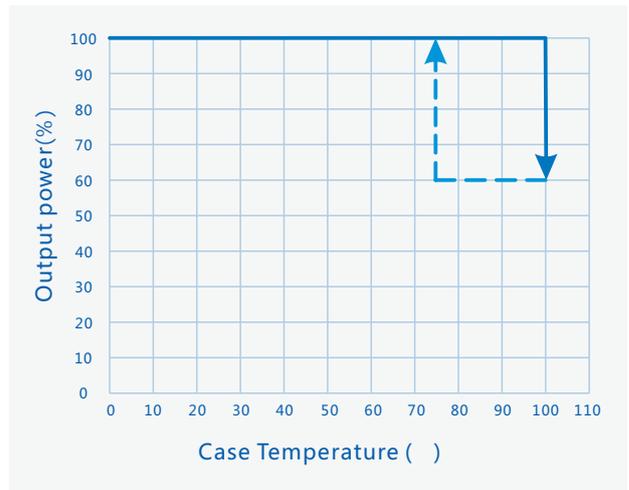

Vs.

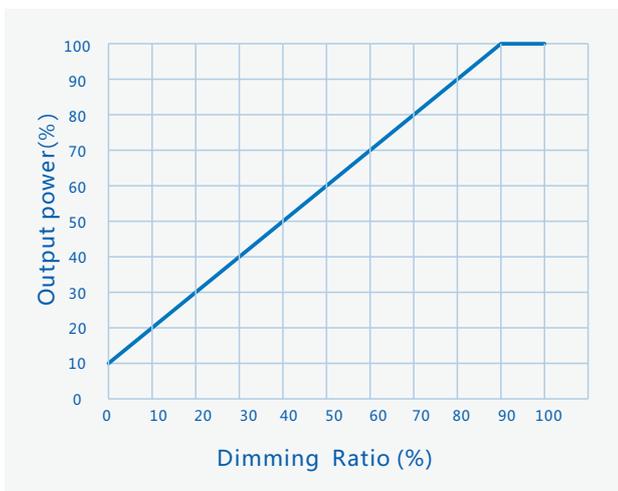

Vs.

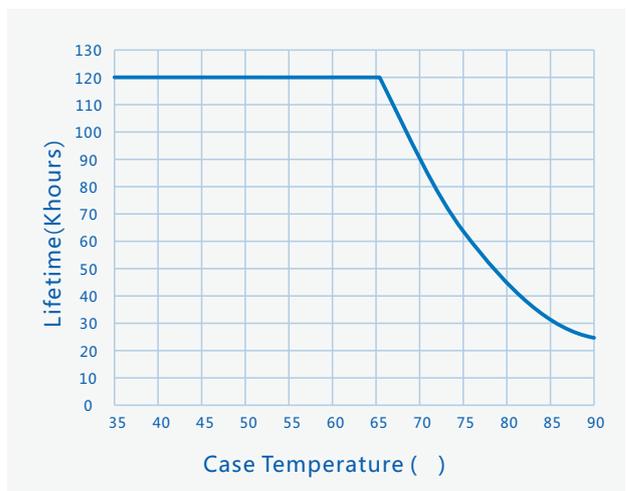

DIM+



1

704

2

c

mm) : × × 580×433×210;

8

5kg

适用于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



|     |  |            |  |
|-----|--|------------|--|
| V00 |  | 2019/01/22 |  |
| V01 |  | 2019/04/25 |  |
| V02 |  | 2019/06/17 |  |
| V03 |  | 2019/09/09 |  |
| V04 |  | 2020/03/05 |  |
| V05 |  | 2020/05/09 |  |
| V06 |  | 2021/07/02 |  |
| V07 |  | 2021/09/02 |  |
| V08 |  | 2023/02/01 |  |

