



: SS-240CP-54\*  
: 240W LED  
: V08  
: 2023-02-01



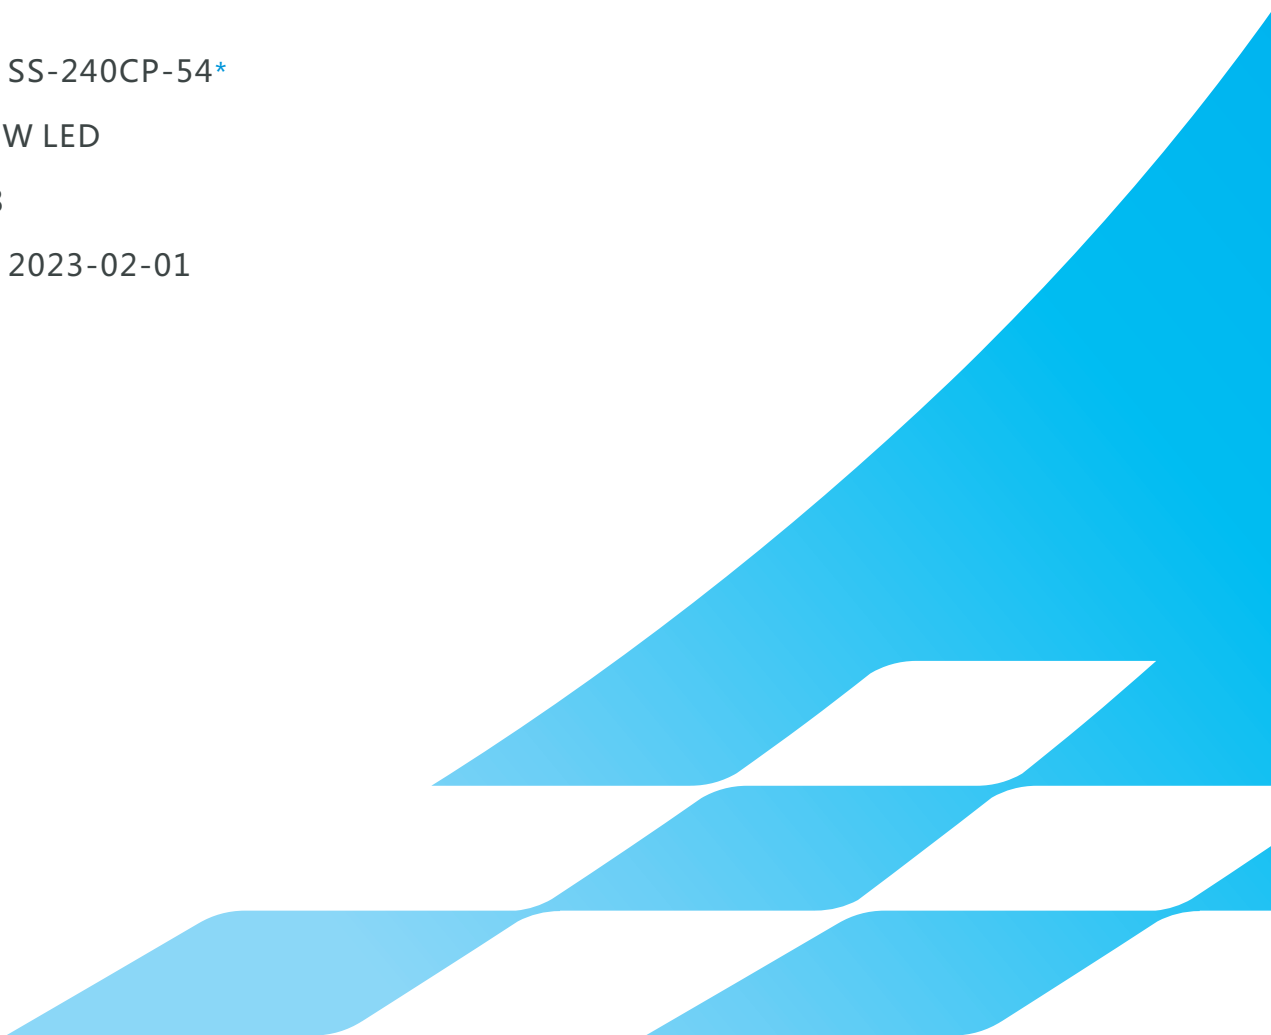

	120Vac			
	108Vac			
	47Hz			
				108Vac

(120Vac)			5	
(220Vac)			95	冷机启动
(277Vac)			12	冷机启动
			5W	220Vac/50Hz, 空载
	0.95	0.98		220Vac/50Hz, 满载
	0.90			120-277Vac/50Hz, 70-100%载
		7%	10%	220Vac/50Hz, 满载
			20%	120-277Vac/50Hz, 70-100%载

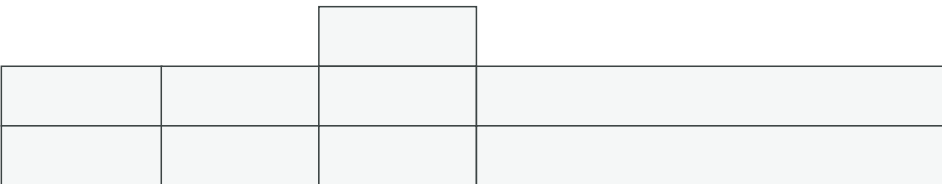




1-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+ /DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+ /DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
		10Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
	65	100,000 hours			80%
	77	55,000 hours			80%
MTBF		205,000 hours			220Vac, 25 (MIL-HDBK-217F)
		IP65			
		85			
		5			75
		1950g			
		182mm*71.5mm			x

25 LED






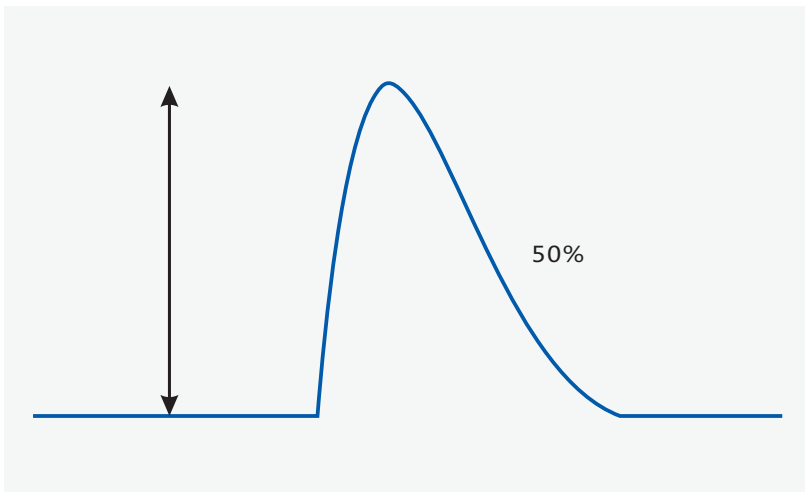

		T (@ 10%)	T (@ 50%)
120Vac	50A	600uS	
220Vac	95A		70uS
220Vac	125A	600uS	




Vs. ( /AOC )

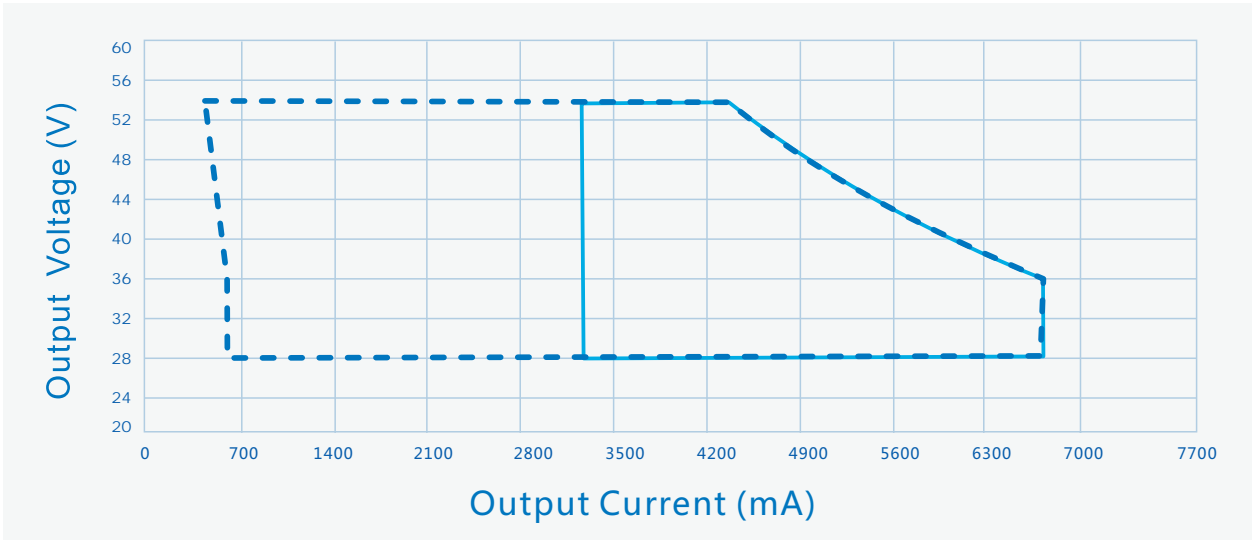

----- Dimming Window      ————— AOC Window


Vs. (Vin=120Vac)

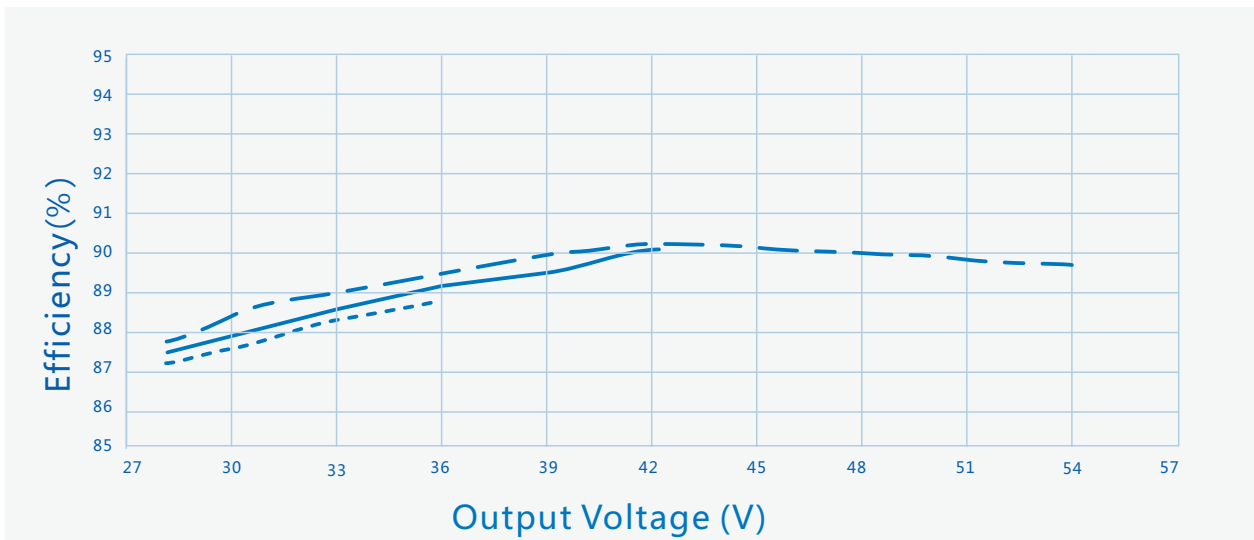

----- Io=6700mA      ————— Io=5550mA      - . - . Io=4400mA




Vs. (Vin=220Vac)

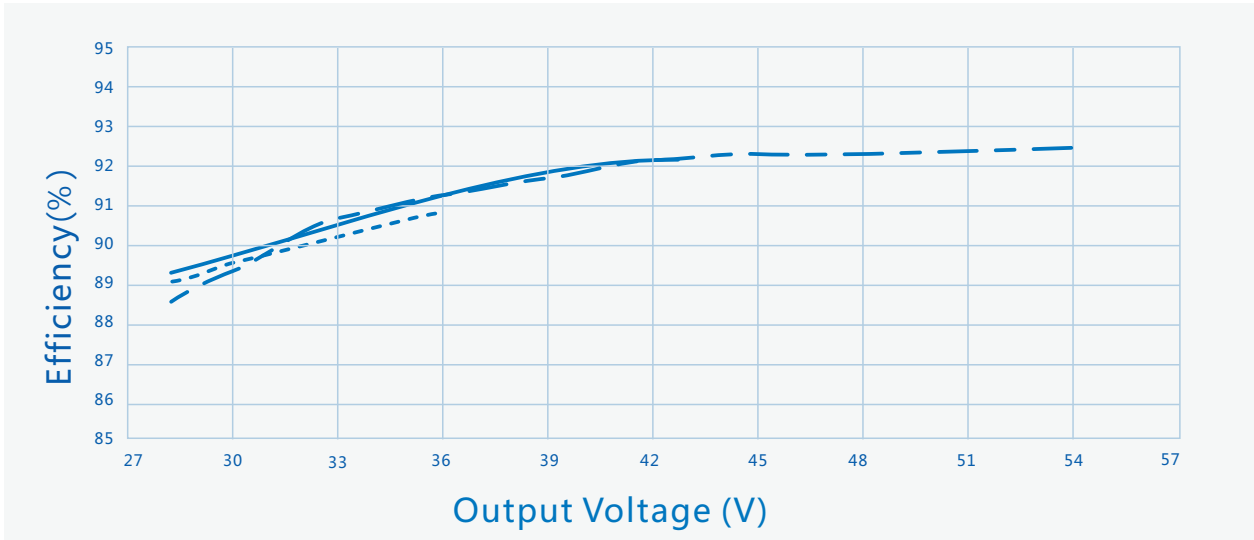

----- Io=6700mA      ————— Io=5550mA      - - - - Io=4400mA


Vs. (Vin=277Vac)

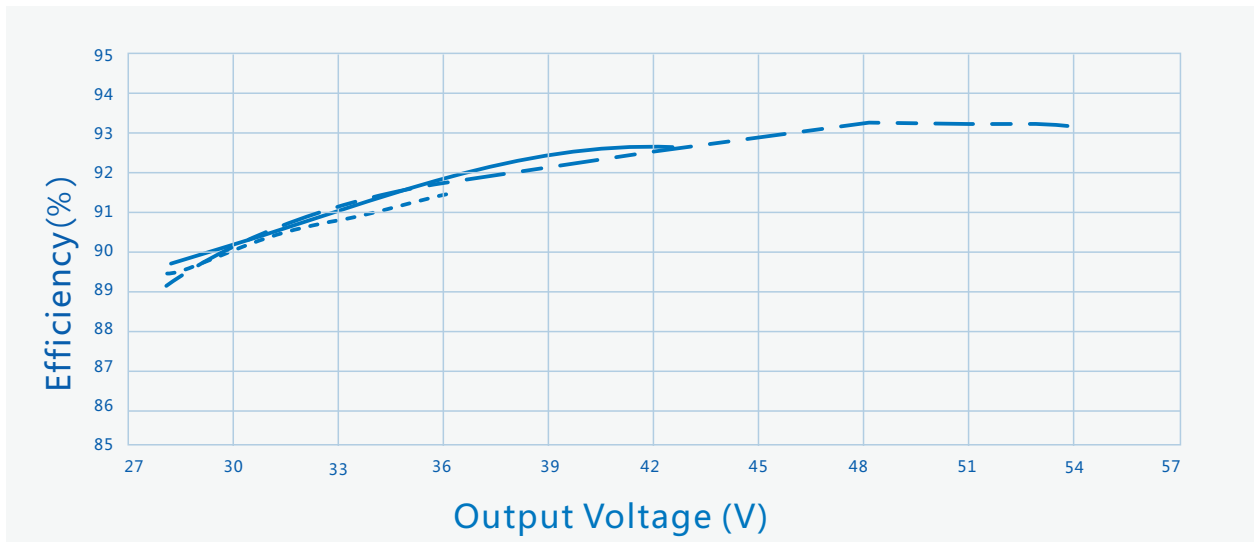

----- Io=6700mA      ————— Io=5550mA      - - - - Io=4400mA




Vs.

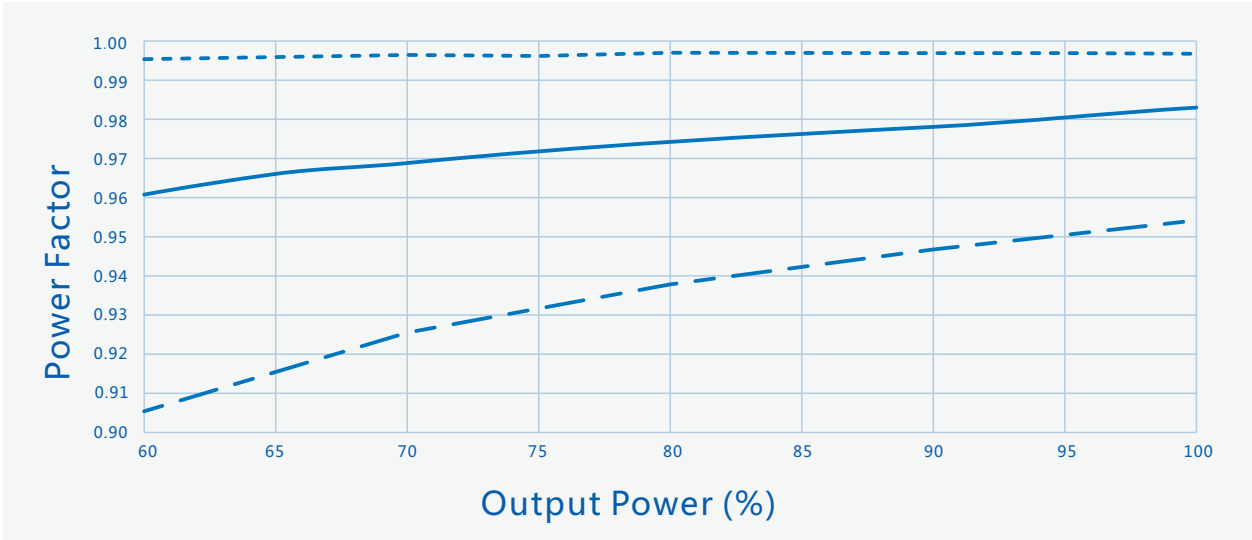

----- Vin=120Vac    ——— Vin= 220Vac    - - - Vin=277Vac


Vs.

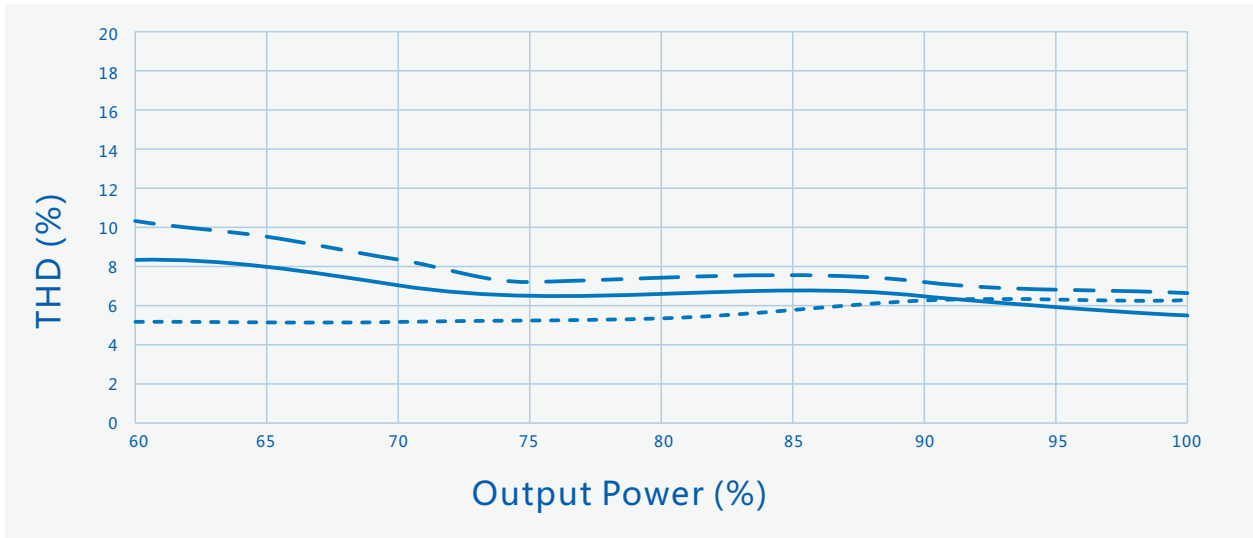


----- Vin=120Vac    ——— Vin= 220Vac    - - - Vin=277Vac




Vs. ( 60 )

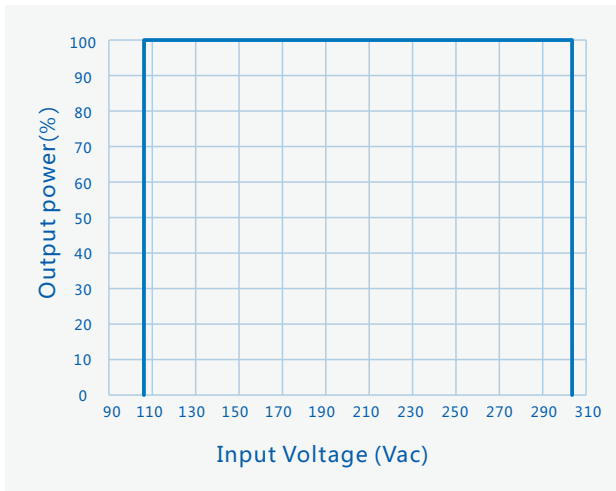


Vs.

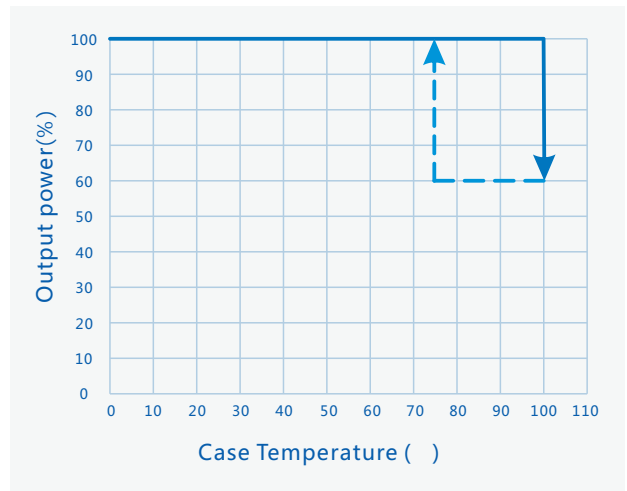

Vs.

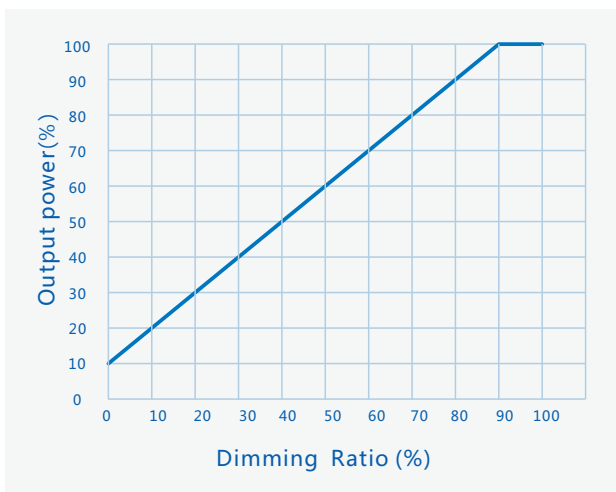

Vs.

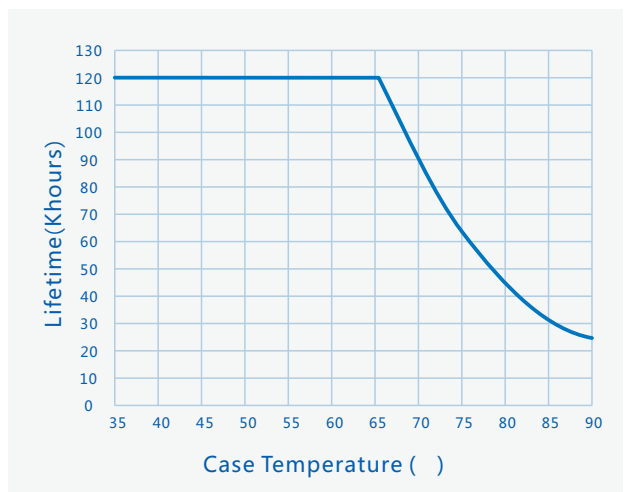

DIM+



1

704

2

c

mm) : × × 580×433×210;

8

5kg

适用于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



V00		2019/01/22	
V01		2019/04/25	
V02		2019/06/17	
V03		2019/09/09	
V04		2020/03/05	
V05		2020/05/09	
V06		2021/07/02	
V07		2021/09/02	
V08		2023/02/01	

