

Your Smart Choice

: SS-450UV-XX

: 450W

: V01

: 2023-04-23

d



SS-450UV



输出
电充



SS-450UV

	220Vac		240Vac	
	200Vac		264Vac	
	47Hz	50/60Hz	63Hz	
			6.5A	200Vac
(220Vac)			150A	冷机启动
			6W	220Vac/50Hz , 空载/

(SS-450UV-48B)

	24V		48V	
空			55V	
		9.4A		
AOC)	6.5A		9.4A	
			450W	
	88.0%	89.0%		@ 220Vac
	-5%		+ 5%	
PK-PK			10%	20MHz
	-1%		+1%	
	-2%		+ 2%	
			10%	
		1S	2S	
	-0.1%/		+0.1%/	0 ~ 45





SS-450UV



0-10V	DC	0V		10V	DIM+ 100uA
		10%Ioset		100%Ioset	DIM+/DIM-
		0.6V	0.8V	0.9V	
		0.3V	0.4V	0.7V	
PWM	PWM	9.8V		10.2V	DIM+ 100uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		10%Ioset		100%Ioset	
		6%	8%	9%	
		2%	4%	7%	
		0Kohm		100Kohm	DIM+ 100uA
		10%Ioset		100%Ioset	
		6Kohm	8Kohm	9Kohm	
		4Kohm	5Kohm	7Kohm	
		55		75	Ta
		/		/	
					OTP
	50	30,000 hours		80%	
	MTBF	200,000 hours		220Vac, 25 (MIL-HDBK-217F)	
		3		50, 80%	
		790g			
		224.5mm*115mm*50mm		x x	

25 LED



SS-450UV

--	--	--	--	--

Ta	-15	25	+45	
	-40	25	+85	
	20%RH		90%RH	
	10%RH		95%RH	

--	--	--	--

UL/CUL	UL60950		
TUV	EN60950		
CCC	GB4943.1-2011		

EMI/EMS	/	
----------------	---	--


	/	
	/	
	/	
	IEC/EN61000-4-5	B (2KV/ 模1kV)



SS-450UV


	1500Vac/5mA	
	1500Vac/5mA	
	500Vac/10mA	
	10MΩ	500Vdc
	0.1Ω	25A/1min
	2mA	240Vac

1. AC-L/AC-N / /PS-ON+/PS-ON-/DIM+/DIM-

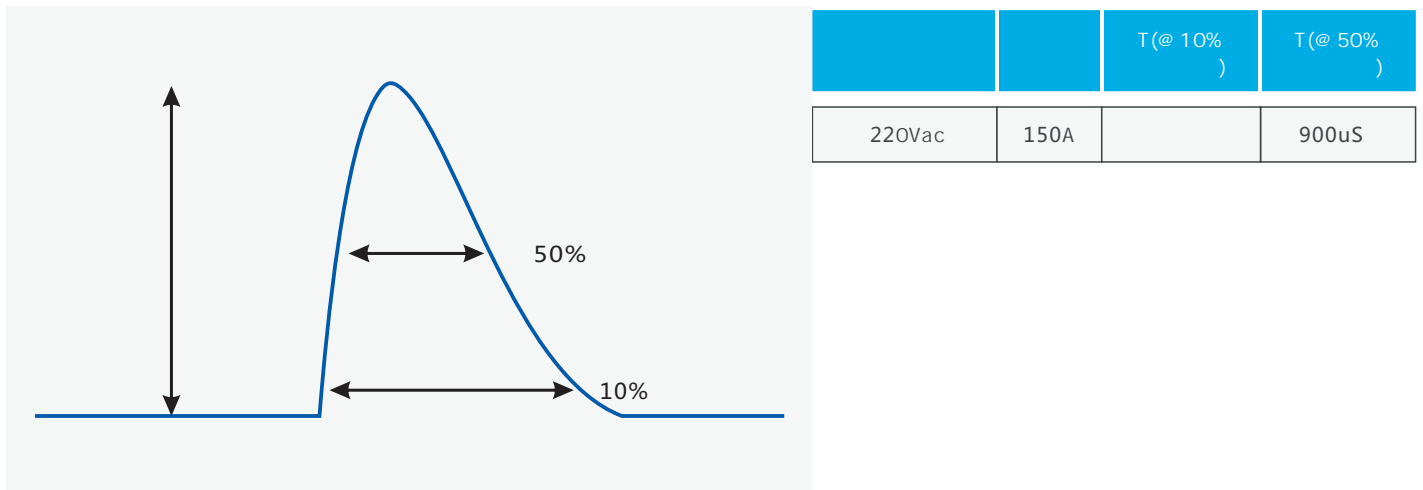


SS-450UV


Vs.

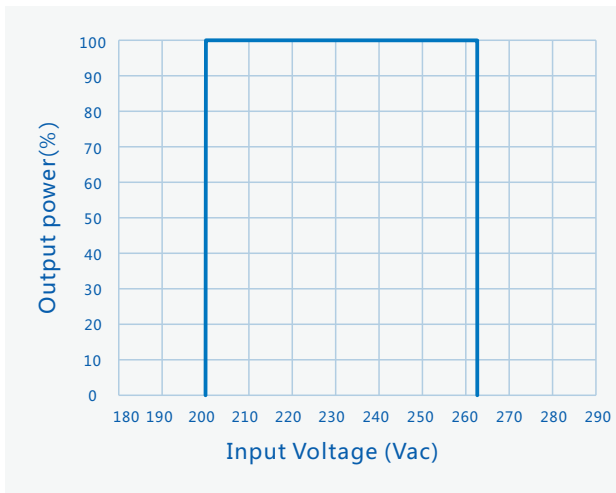


Vs.

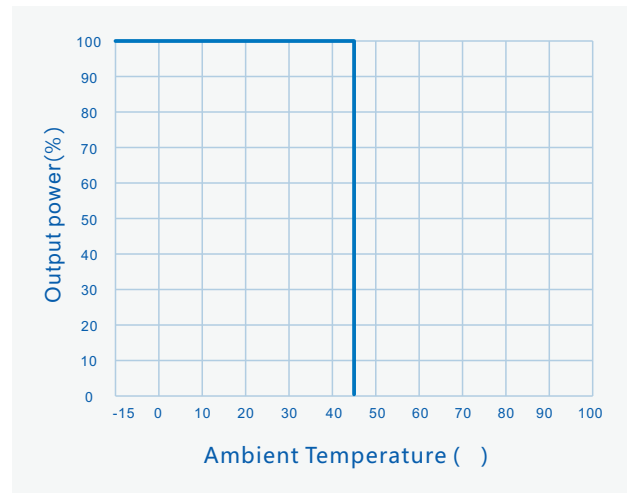

Vs.

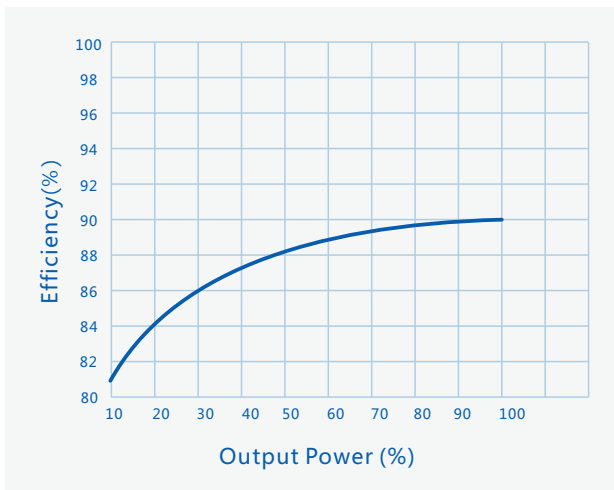

Vs.

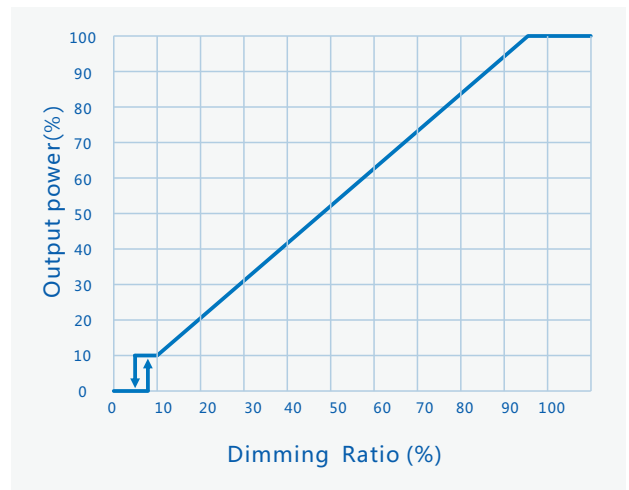

mm)



SS-450UV



- mm) : × × = 412×240×175;

- 12

- 0.79kg

- 11kg

- .

适应于车、船、飞机运输，运输中应遮篷、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

RoHS

RoHS (2011/65/EU)

2015/863/EU





V00	-i fÑ A #€ 2022 09 17 C.P