

: SS-100CP-54*
: 100W LED
: V08
: 2023-02-01



SS-100CP LED



	120Vac		277Vac	
	108Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			1.4A	108Vac
			117W	108Vac
(120Vac)			40A	
(220Vac)			60A	冷机启动
(277Vac)			90A	冷机启动
			2W	220Vac/50Hz , 空载
	0.95	0.97		220Vac/50Hz , 满载
	0.90			120-277Vac/50Hz , 70-100%载
		8%	10%	220Vac/50Hz , 满载
			20%	120-277Vac/50Hz , 70-100%载



SS-100CP LED



1-10V		0V		12V	DIM+ 110uA
		10%Iomax		100%Ioset	DIM+ /DIM-
		1V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 110uA
	PWM	0V		0.3V	DIM+ /DIM-
	PWM	1KHz		2KHz	
	PWM	10%		100%	
		10Kohm		100Kohm	DIM+ 110uA
		10%Iomax		100%Ioset	
	65	100,000 hours			80%
	75	55,000 hours			80%
MTBF		238,000 hours			220Vac, 25 (MIL-HDBK-217F)
		IP65			
		85			
		5			75
		1200g			
		132mm*71mm			x

25 LED





Tcase	-40	25	+85	
	-40	25	+90	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	





UL/cUL	UL8750	✓	
TUV		✓	
RCM	AS/NZS61347.2.13	✓	
BIS	IS15885:2012 Part 2 Sec 13		
CCC	GB 19510.14-2009	✓	
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	



EMI/EMS	/	
	EN55015:2013+A1:2015	
	EN55015:2013+A1:2015	
	IEC/EN 61000-3-2	Class C
	IEC/EN 61000-4-5	B (模4kV , 模4kV)
	IEC/EN 61000-4-12	B (6kV, 6kV)









Vs.

Vs.





Vs.

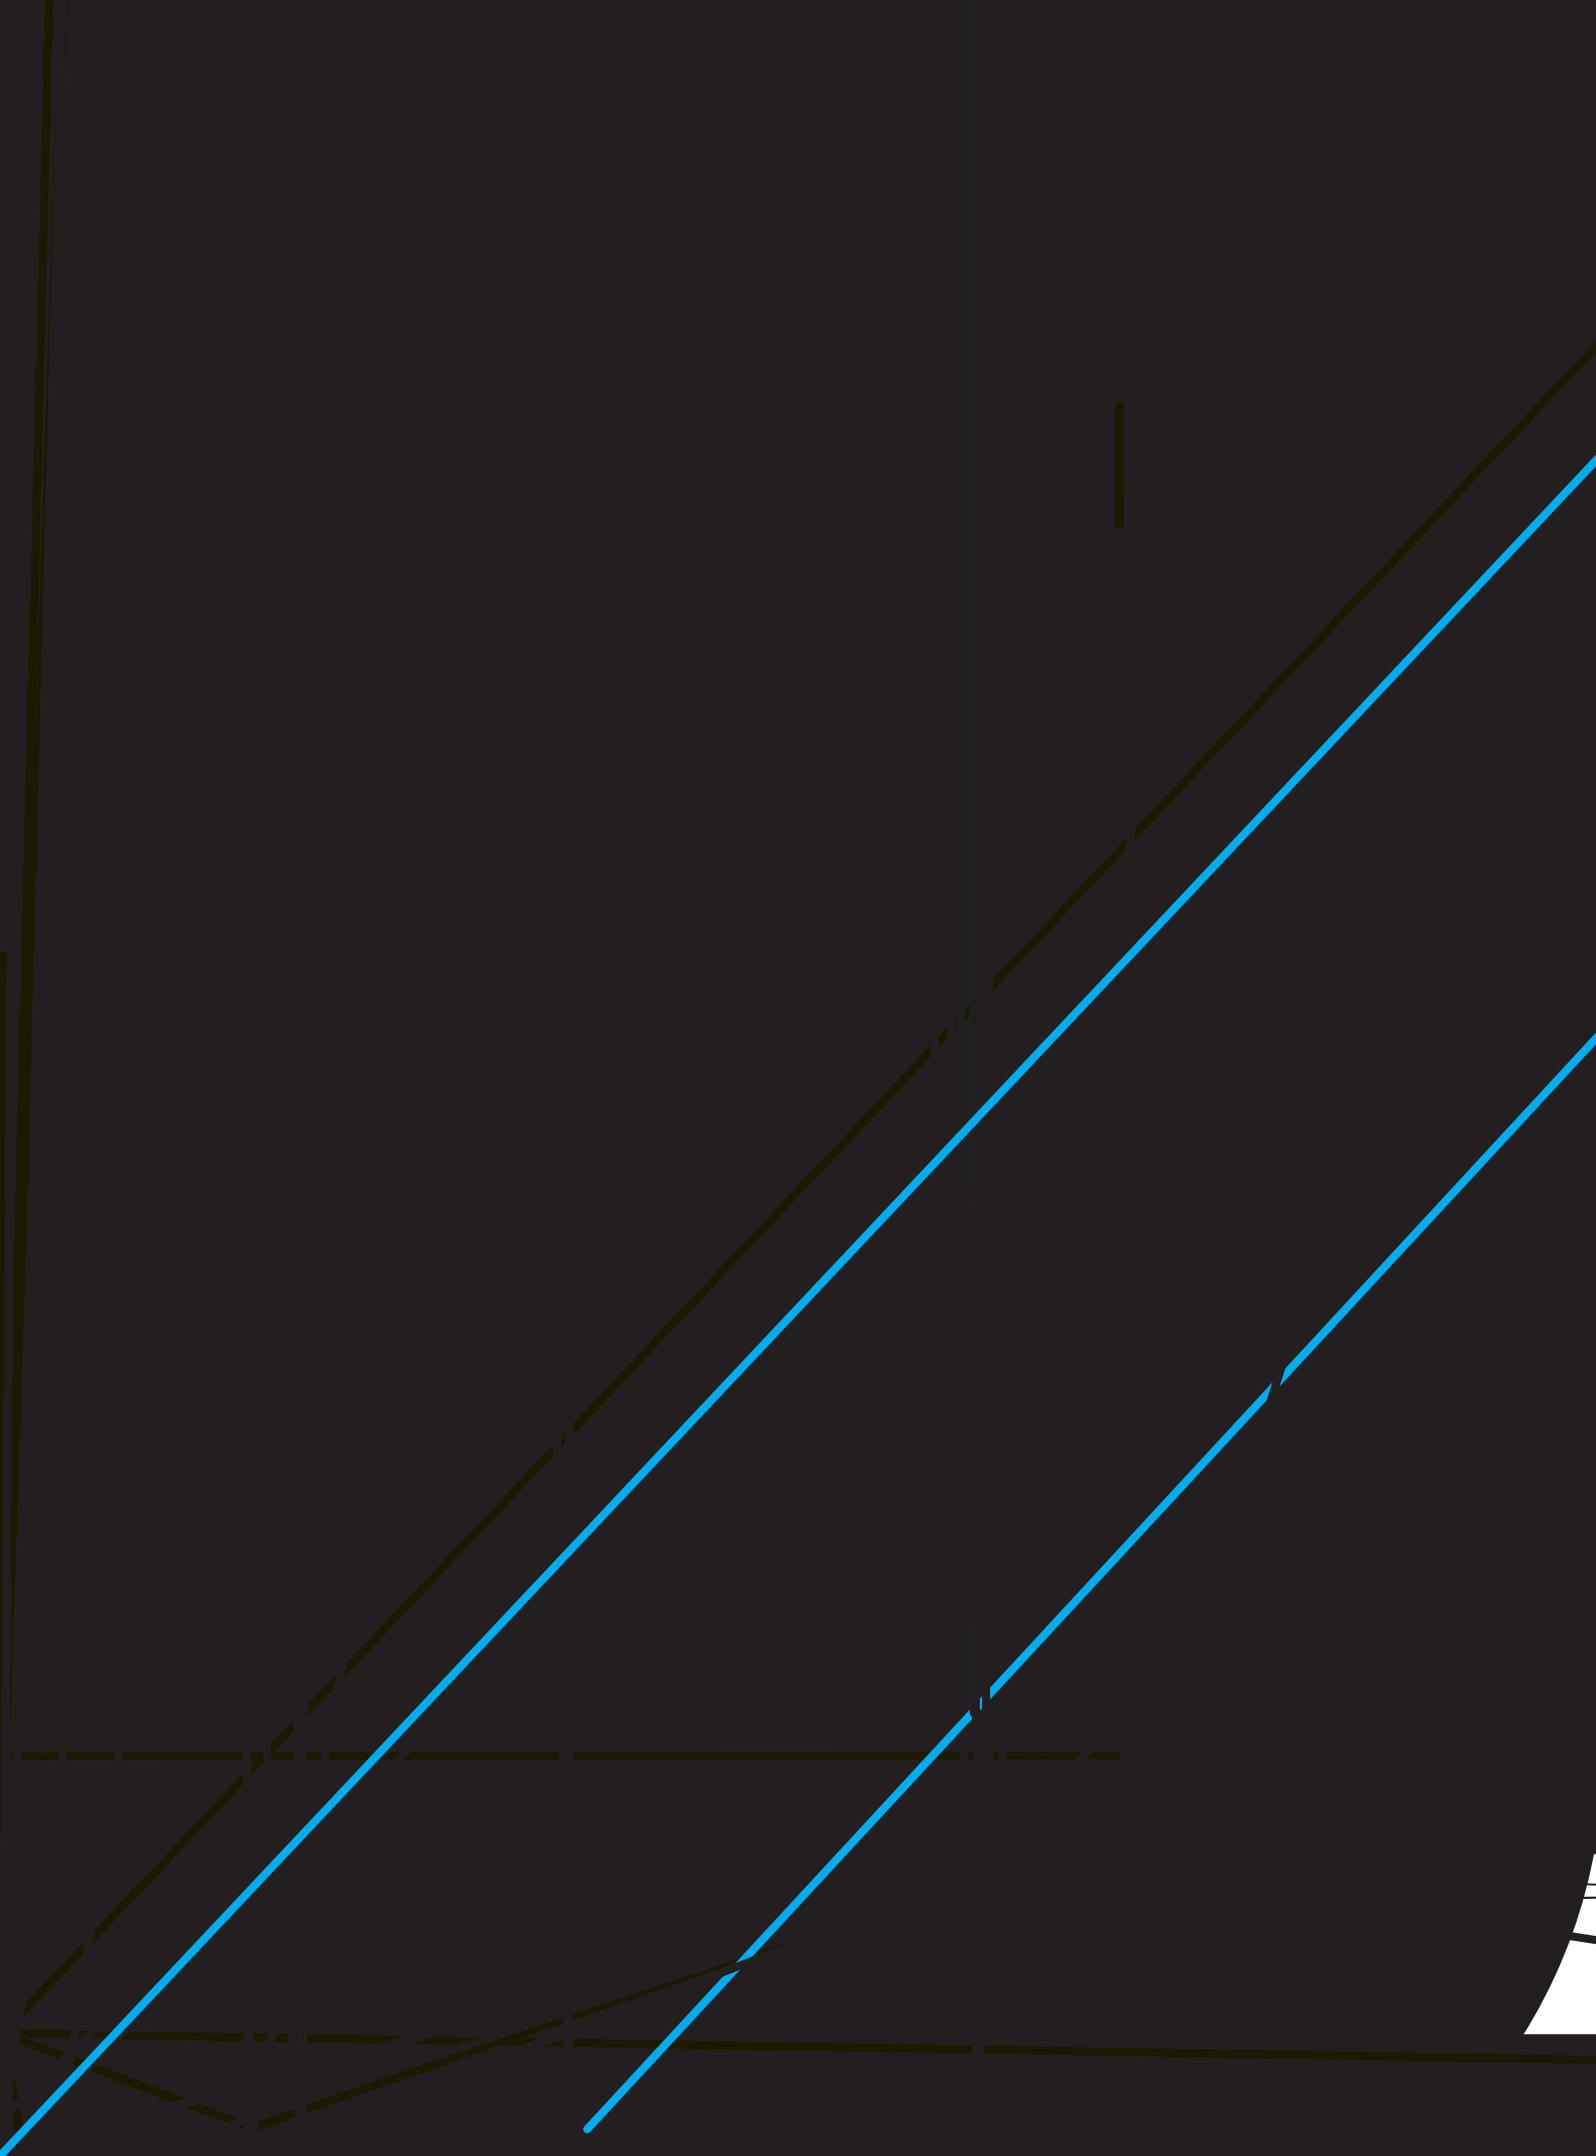



1

2588258 (U) (U) 704

2

- mm) : × × = 495×385×162;

- 9

- 1.2kg

- 11.8kg

。适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。



V00		2018/10/18	
V01		2019/04/25	
V02		2019/06/17	
V03		2019/09/09	
V04		2020/03/05	
V05		2020/05/09	
V06		2021/07/02	
V07		2021/09/02	
V08		2023/02/01	

