


: SS-35AH-XX
: 35W
: V00
: 2019-5-25



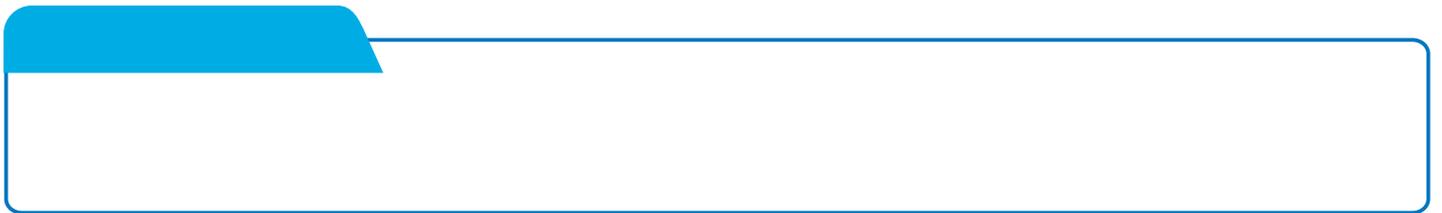

SS-35AH

	100Vac		277Vac	
	90Vac		305Vac	
	47Hz	50/60Hz	63Hz	
			0.45A	100Vac
			43W	230Vac
(220Vac)			50A	冷机启动
		0.4W	0.5W	220Vac/50Hz, 空载

		12.6V		
			2.9A	
			13.2V	
@ 220Vac	85.0%			12.6V/2.9A
	-5%		+5%	
PK-AV		1%	3%	
			0.5S	110Vac/60HZ
	-1%		+1%	
	-3%		+3%	
	-5%		+5%	di/dt= 1A/us,25% -50% -25%
			10mS	



SS-35AH



		105% Io		110% Io	230V/50HZ
		120% Vo		150% Vo	
				10W	
		90	100	110	
		-0.03%/		+0.03%/	0 85
	75	50,000 hours			220Vac, 满载
	MTBF	200,000 hours			220Vac, 25 (MIL-HDBK-217F)
		85			
		5			
		350g			
		193mm*40mm*21mm			x x

25



SS-35AH



Tcase	-40	25	+85	
	-40	25	+85	
	10%RH		90%RH	
	5%RH		95%RH	
	-65m		4000m	



UL/CUL	UL8750		
TUV	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013 EN62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013	✓	



EMI/EMS	/	
CE	EN55015:2013+A1:2015	Class B
RE	EN55015:2013+A1:2015	Class B
	IEC/EN61000-3-2	Class C
	IEC/EN61000-4-5	B (4KV/差模2kV)




SS-35AH




	UL 绝缘要求	TUV绝缘要求	CCC绝缘要求	
	1600Vac	3000Vac	3750Vac	
	1600Vac	1500Vac	1875Vac	
	500Vac	1000Vac	1000Vac	(10mA)
	10MΩ		500Vdc	
	NA			
	0.75mA		277Vac	

1. EMC
2. LN

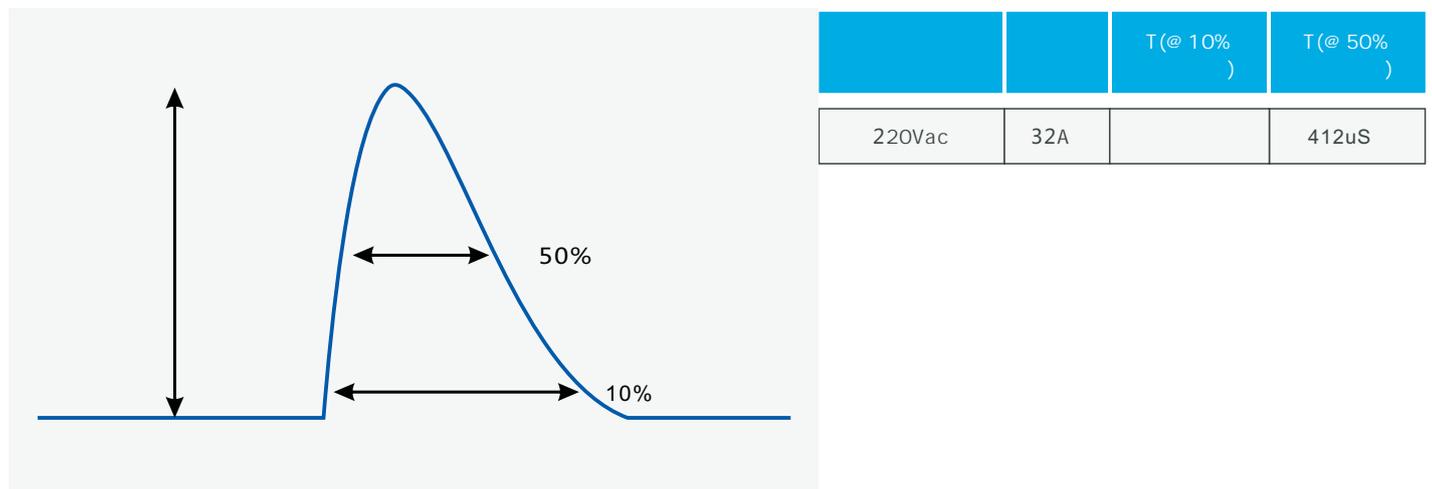





Vs.



SS-35AH

mm/inch)

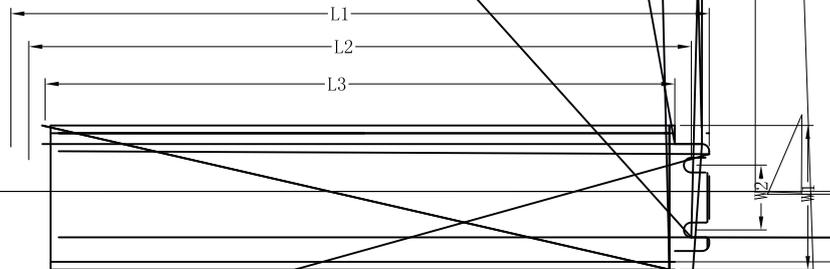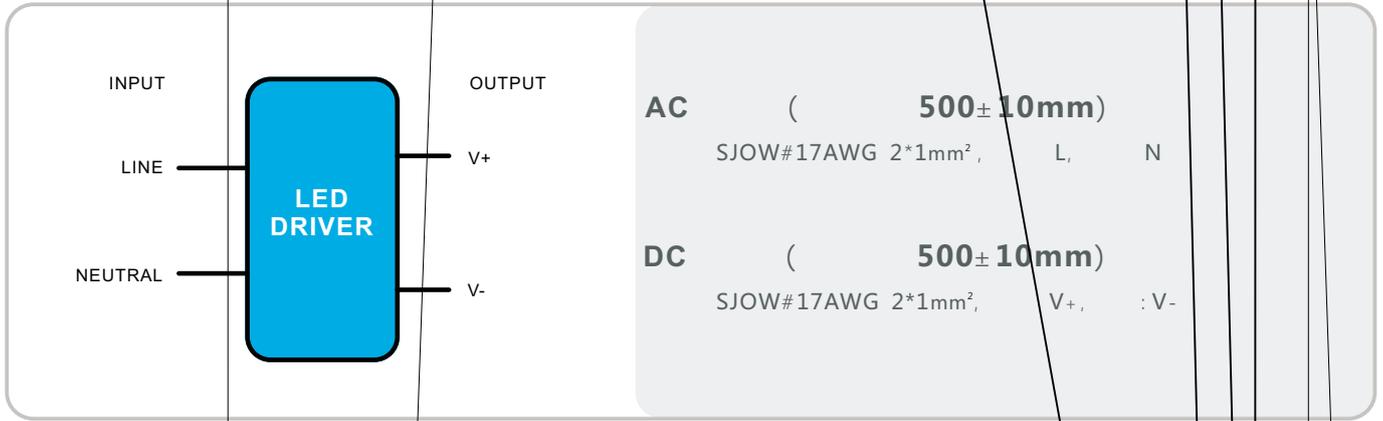



- mm) : × × = 495×385×162;
 - 40
 - 0.35kg 16kg
 -
- LED电源使用说明书》。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品 检合纒使。

SS-35AH



V00		2019/05/25	
V01		2019/09/17	

