

SOSEN LED Driver, Your Smart Choice

SS-72AH LED

: SS-72AH-XX

: 72W LED

: V02

: 2021-07-02



-
- 防
- 全方
-
-
- 质保

型号



--	--	--	--	--

--	--	--	--	--

--

--

--

--

冷机启动
冷机启动
220Vac/50Hz , 空载
220Vac/50Hz , 满载
100-27

SS-72AH LED

		22.8V	24V	25.2V	
CV		0A		3.0A	
		15V		18V	
CC		1.5A		3.6A	
	AOC)	1.3A		4.0A	
				25.2V	
	@ 120Vac	83.0%	84.0%		24V/3.0A
	@ 220Vac	86.0%	87.0%		24V/3.0A
	@ 277Vac	86.0%	87.0%		24V/3.0A
		-5%		+ 5%	
		-5%		+ 5%	
	PK-AV			10%	
				10%	
				0.5S	120Vac
				0.5S	220Vac
		-2%		+2%	
		-3%		+ 3%	
		-0.03%/		+0.03%/	0 90
		90	100	110	> Tc Typ. < Tc Min.
				10W	



SS-72AH LED



	72	62,000 hours	80%
	MTBF	200,000 hours	220Vac, 25 (MIL-HDBK-217F)
		90	
		5	72
		400g	
		244mm*40mm*21mm	x x

25 LED












Vs.


Vs.



Vs.

(60)

Vs.

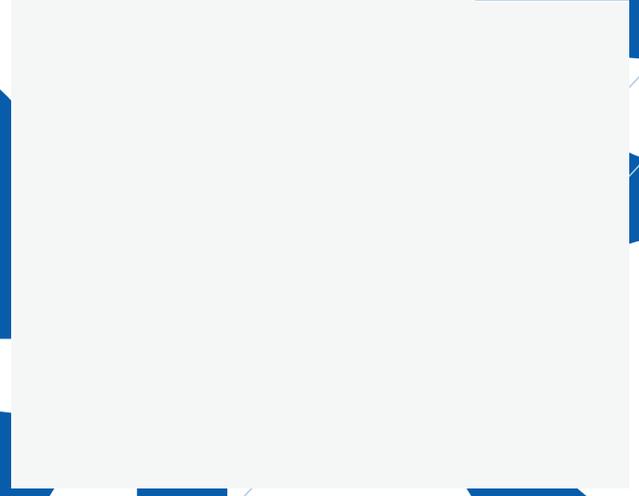

Vs.



Casēed

V-V

AC (**400±10mm**)

H05RN-F 3*1.0mm² 7.4mm, :L :N :

DC (**300±10mm**)

H05RN-F 2*1.0mm² :7.0mm :V+ :V-



1 , , 704

- mm) : × × = 370×280×160;
- 10
- 0.4kg 5kg
-
- 。

适应于车、船、飞机运输，运输中应遮蓬、防晒、文明装卸。

产品贮存应符合GB 3873 - 83的规定。

贮存期限超过1年的产品要重新检验，合格后方可使用。

SS-72AH LED

9 SS-72AH LED 2019/12/28

V00		2019/12/28	

