

SOSEN LED Driver, Your Smart Choice


SS-240CNL-E (64) LED

: SS-240CNL-E260*

: 240WLED

: V05

: 2023-11-15

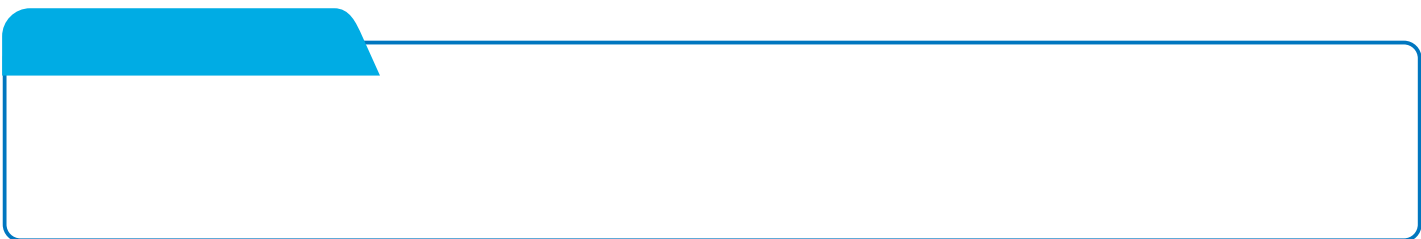

" * "

" * "	DALI (:D)	AUX 12V (:H)	0-10V/PWM/Resistor	1-10V/PWM /Resistor (:B)	
B		✓	✓	✓	



	120Vac		277Vac	
	90Vac		305V	
	47Hz	50/60Hz	6	
				120Vac
			288W	120Vac
			60A	
			100A	
			130A	
			0.5W	220Vac/50Hz (BH)
	0.5			220Vac/50Hz
				120-277Vac/50Hz 70-100%
				220Vac/50Hz
				120-277Vac/50Hz 70-100%





86-755-29358800

86-755-29358816

en.cw

AUX		10.8V	12V	13.8V	
				200mA	
0-10V		0V		12V	DIM+ 100uA
		10% Iomax		100% Ioset	DIM+/DIM-
		0V		10V	
PWM	PWM	9.8V		10.2V	DIM+ 100uA
	PWM	0V		0.3V	DIM+/DIM-
	PWM	1KHz		2KHz	
	PWM	0%		100%	
		0Kohm		100Kohm	DIM+ 100uA
		10% Iomax		100% Ioset	
(BH)		0.7V	0.8V	0.95V	()
		0.95V	1.1V	1.2V	()
DALI		1-170(10%)		254(100%)	
DALI		DALI-2			
	85	50,000hours			80% ,220Vac
MTBF		198,000hours			220Vac, , 25 (ML-HDBK-217F)
		IP 65			
		90			
		5			: 85
		735g			
		128mm * 62.5mm			x


25 LED








Vs. (/AOC)

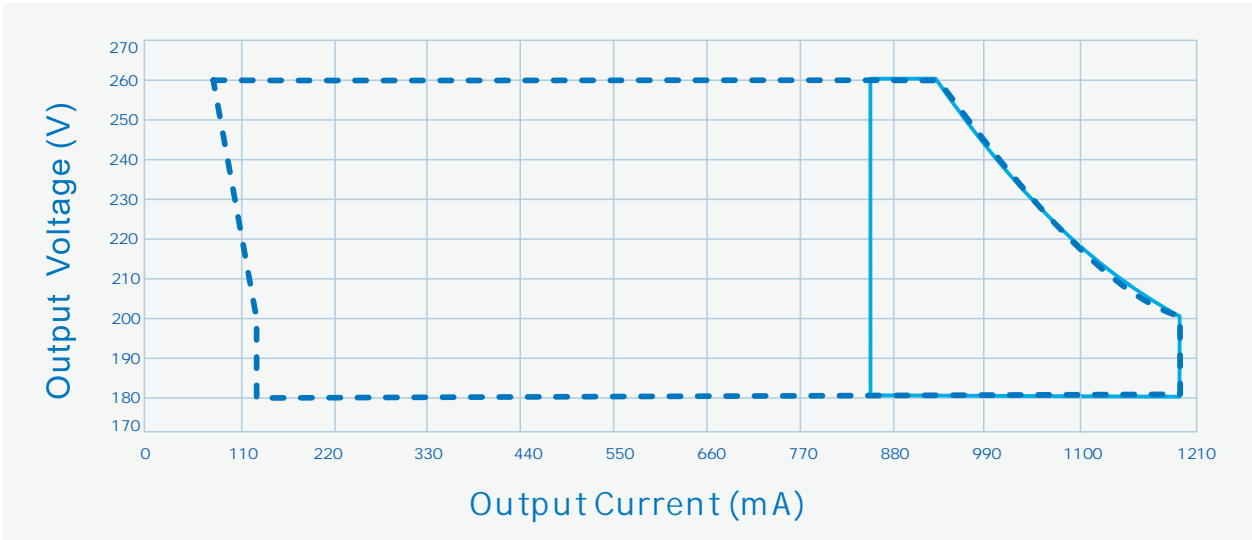

----- Dimming Window ————— AOC Window

Vs. (Vin=120Vac)

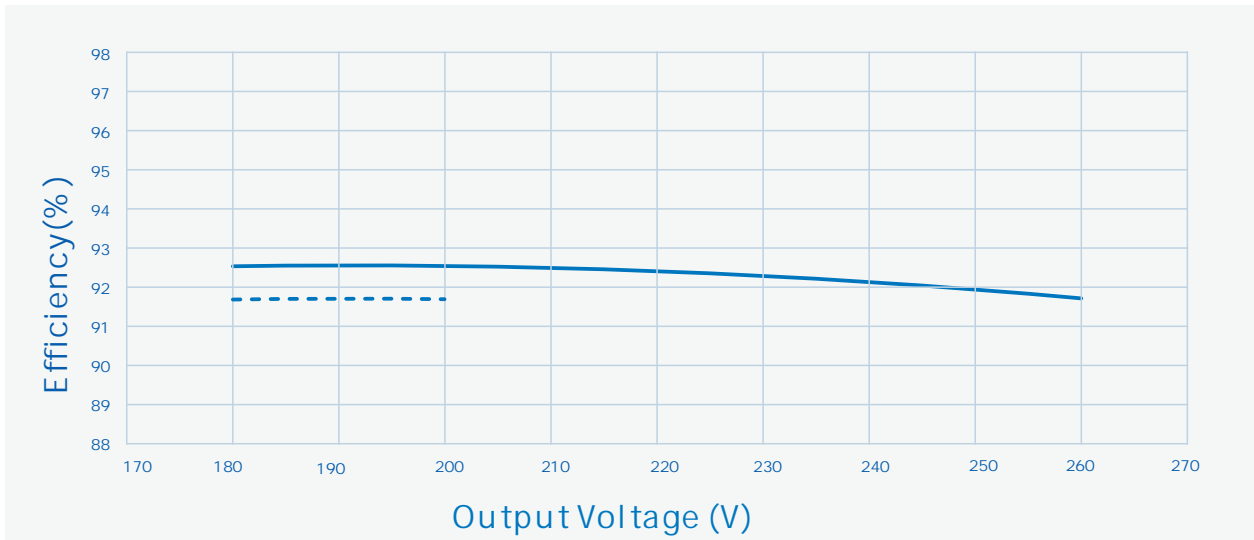

----- Io=1200mA ————— Io=920mA





Vs.

Vs.





Vs.







1				704
2				
3		5mm		
4、	LED+	LED-	1.8mm	
5、				
6、	LED			
7	LED			
8		LED		

-		mm	×	×	=495× 385× 162;
-		9			
-	0.735kg			8.17kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------



V00		2022/06/30	
V01		2022/08/24	
V02	DALI	2023/02/01	
V03		2023/04/14	
V04		2023/05/06	
V05		2023/11/15	

