

SOSEN LED Driver, Your Smart Choice

SS-120SN-E260* LED


: SS-120SN-E260*

: 120WLED

: V03

: 2023-11-17



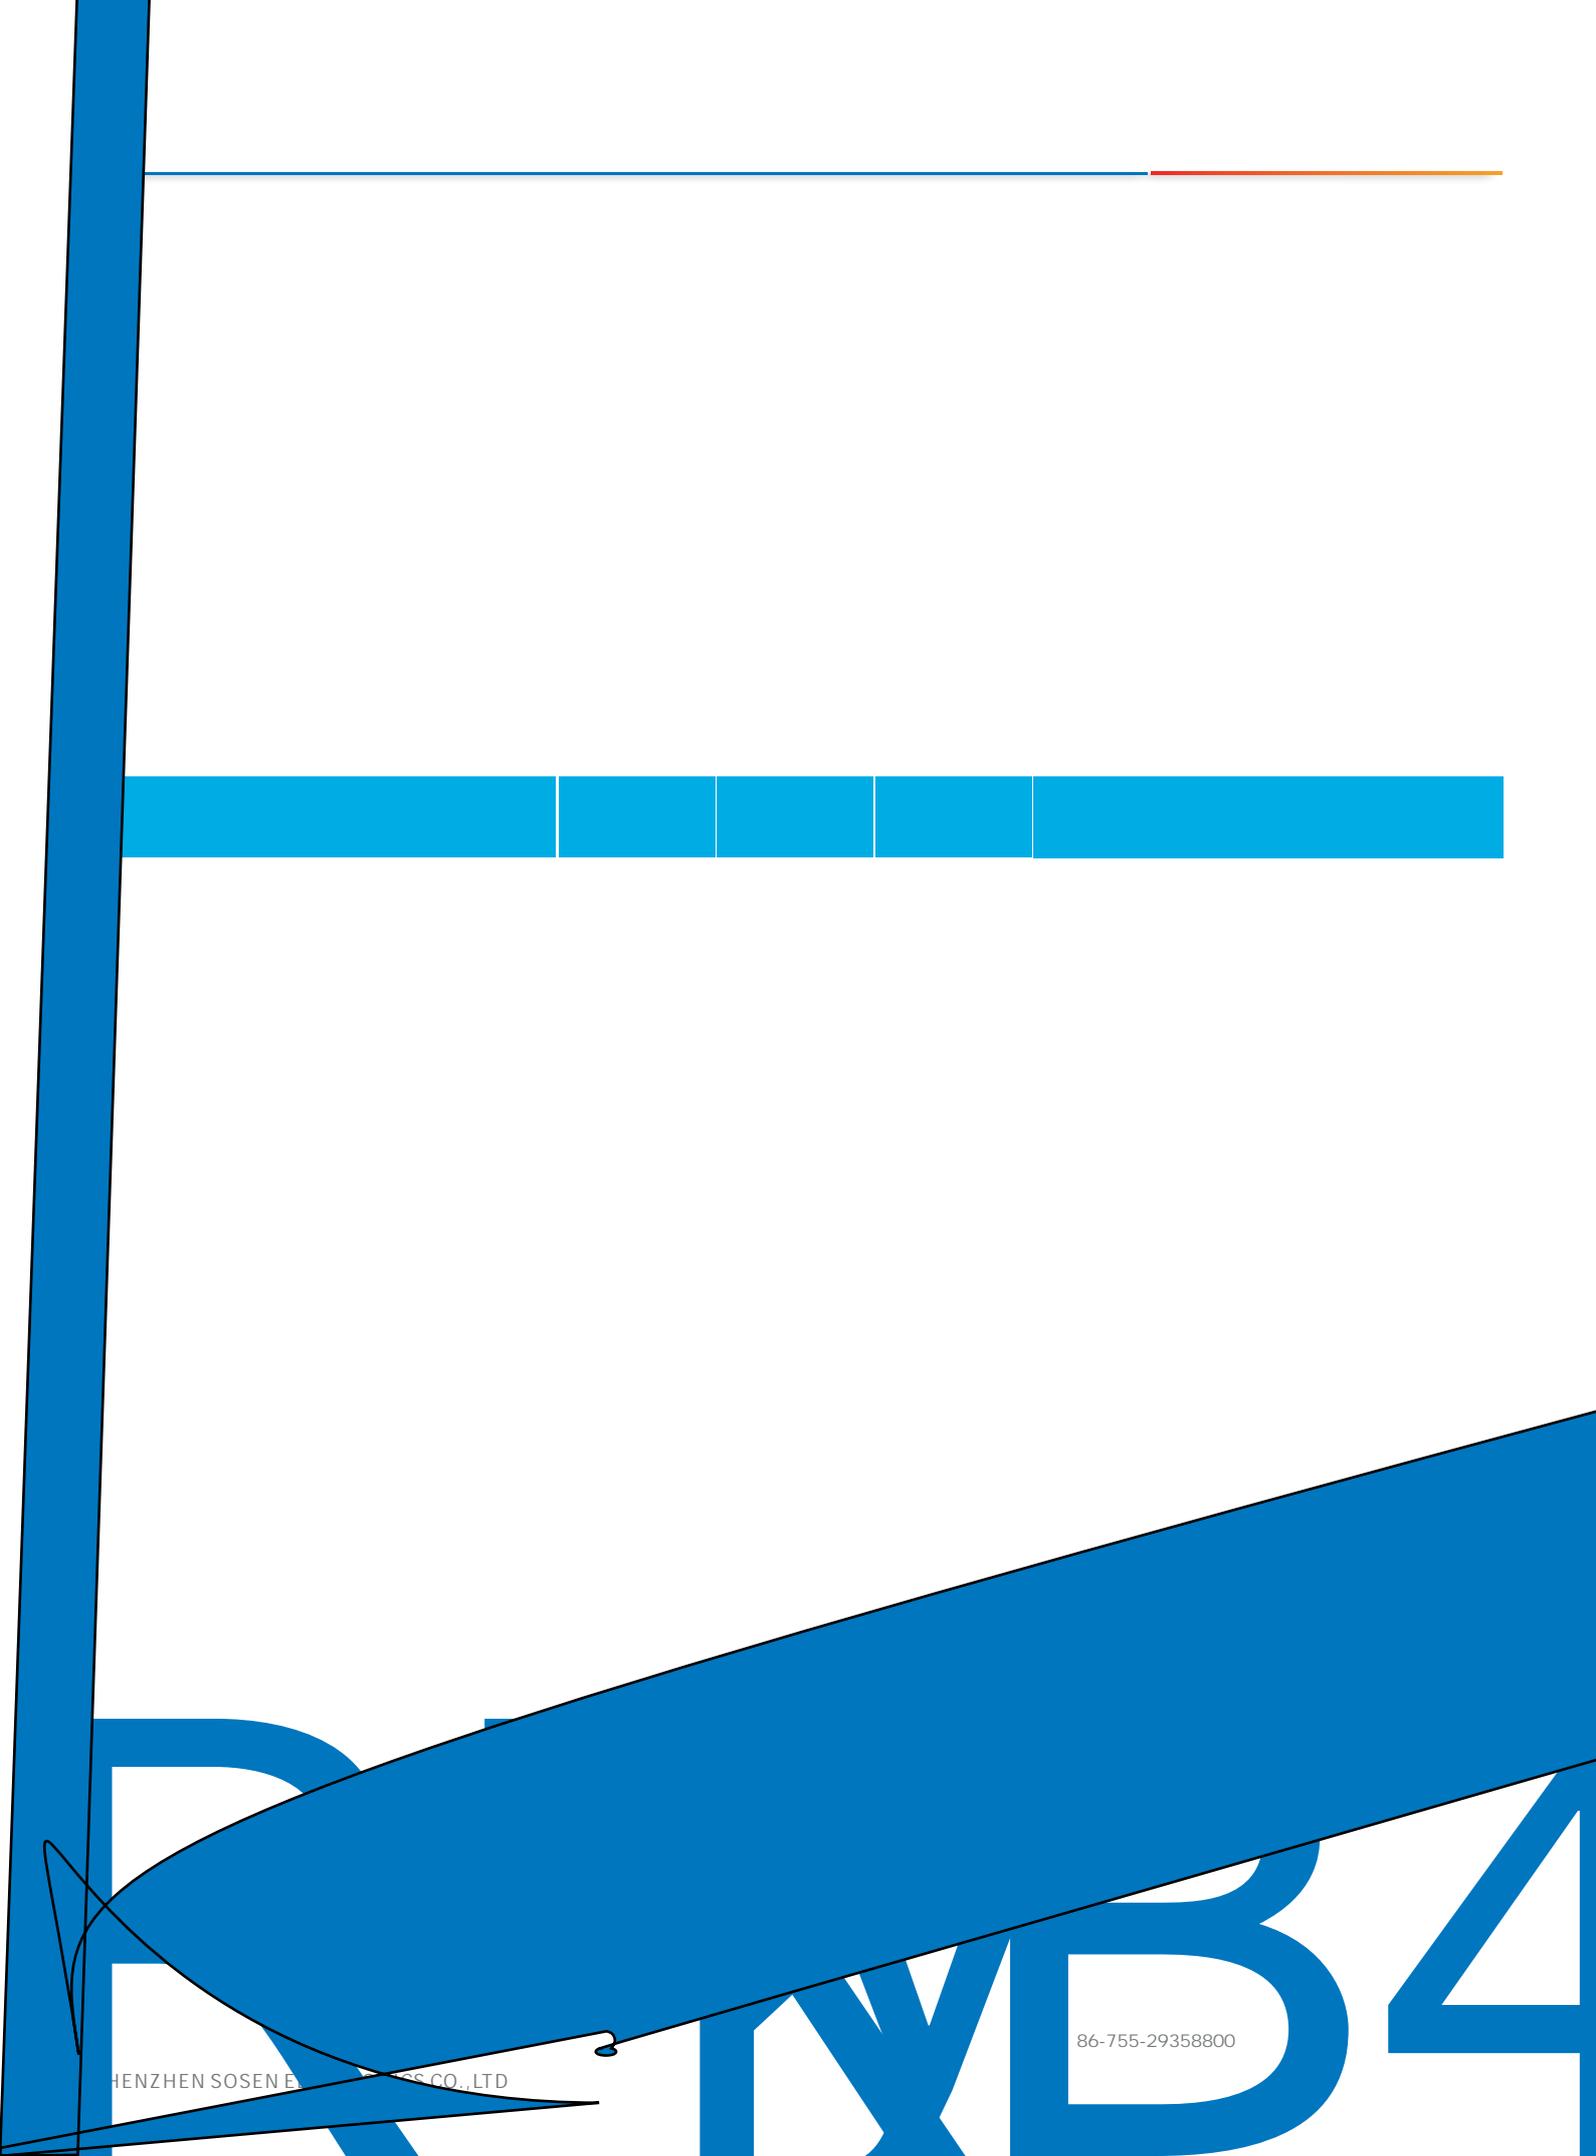

DRIVE
TYPE B4











Tcase	-40	25	+90	
	-40	25	+90	
	10% RH		90% RH	
	5% RH		95% RH	
	-65m		4000m	



UL/cUL	UL8750	✓	
TUV	EN 61347-2-13:2014/A1:2017 EN 61347-1:2015 EN 62493:2015		
RCM	AS/NZS61347.2.13		
CCC	GB 19510.14-2009		
CE	EN 61347-2-13:2014 EN61347-1:2008+A1:2011+A2:2013		



EMI/EMS	/	
	FCC Part15: Subpart A; ANSI 63.4:2014	Class A
	FCC Part15: Subpart A; ANSI 63.4:2014	Class A
	IEC/EN 61000-3-2	Class C
	IEC/EN61000-4-5	B (6kV 6kV)
	ANSI/C82.77-5-2017	B (6kV 6kV)
	IEC/EN 61000-4-12;ANSI/C82.77-5-2017	B (6kV 6kV)




:



	UL 绝缘要求	TUV绝缘要求	
	1600Vac	/	
	1600Vac	/	
	1600Vac	/	
	500Vac	/	
	10M		500Vdc
	0.1		25A/1min
	0.75mA		347Vac

- 1. EMC EMC
- 2. L/N / /
- 3.

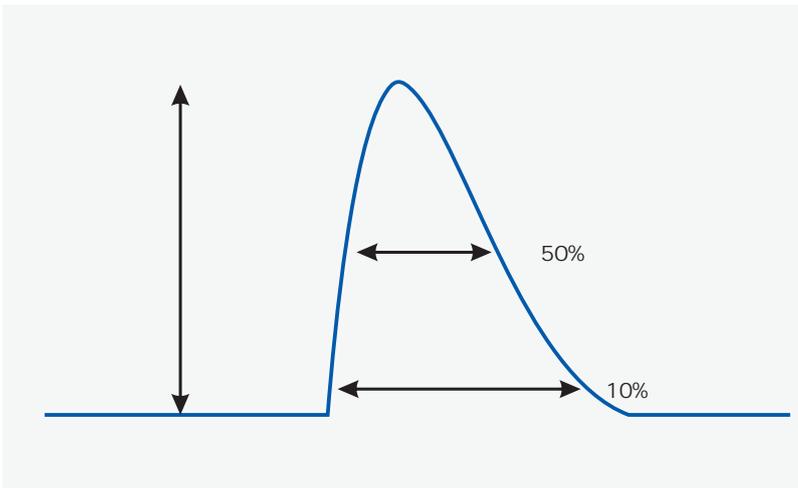


Vin		(@ 10%)	(@ 50%)
120Vac	80A	542uS	
220Vac	100A		358uS
347Vac	120A	582uS	



Vs.

/AOC


Vs. (Vin=220Vac)

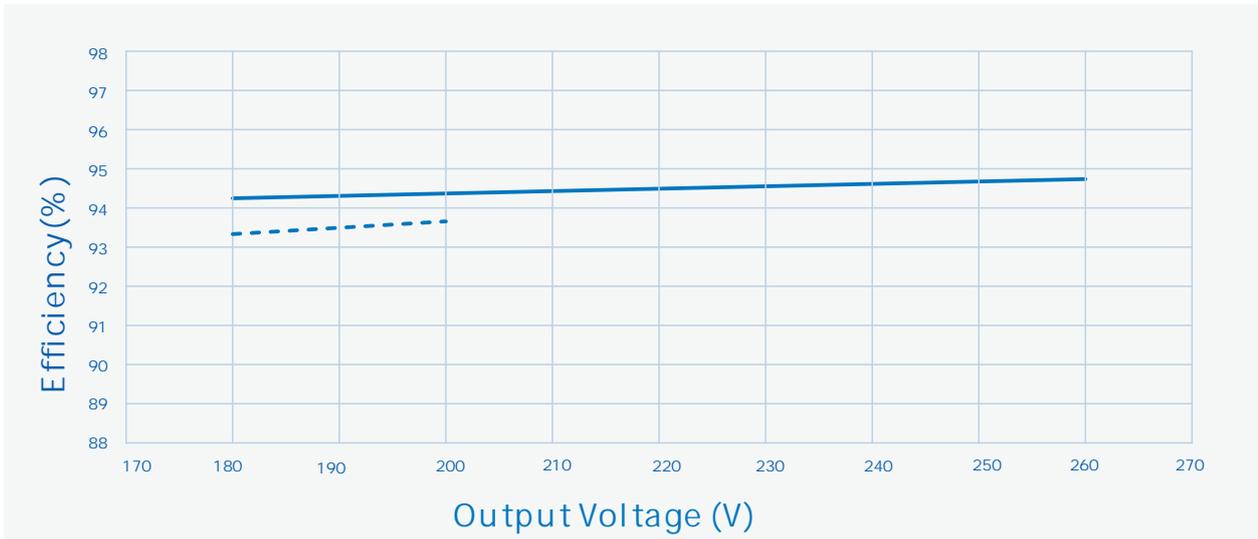

----- Io=600mA

———— Io=460mA

Vs. (Vin=347Vac)

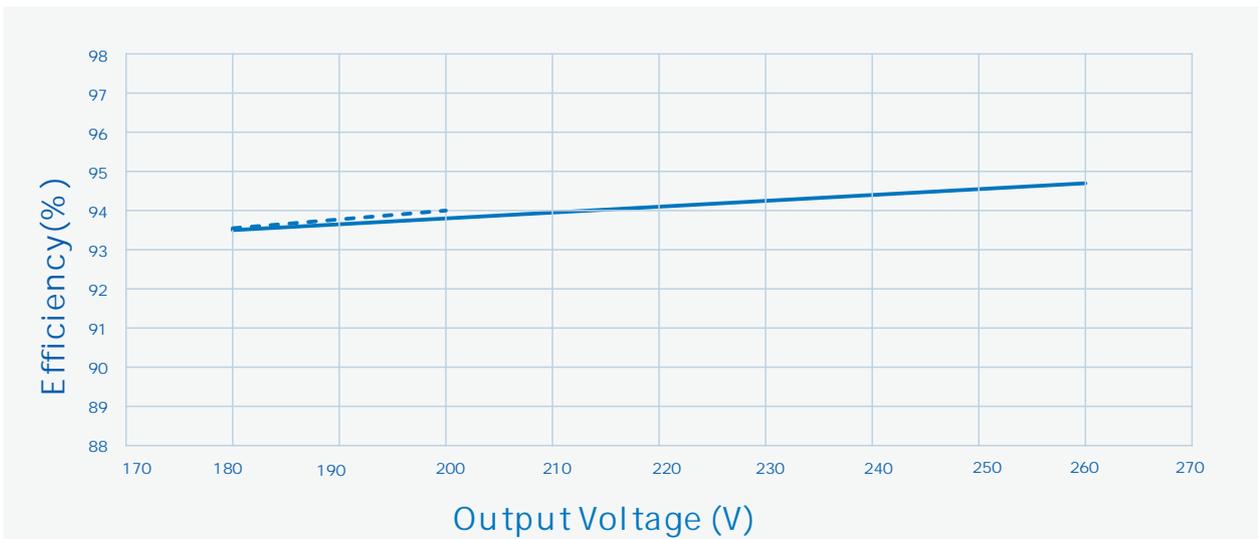


----- Io=600mA

———— Io=460mA



260* LED

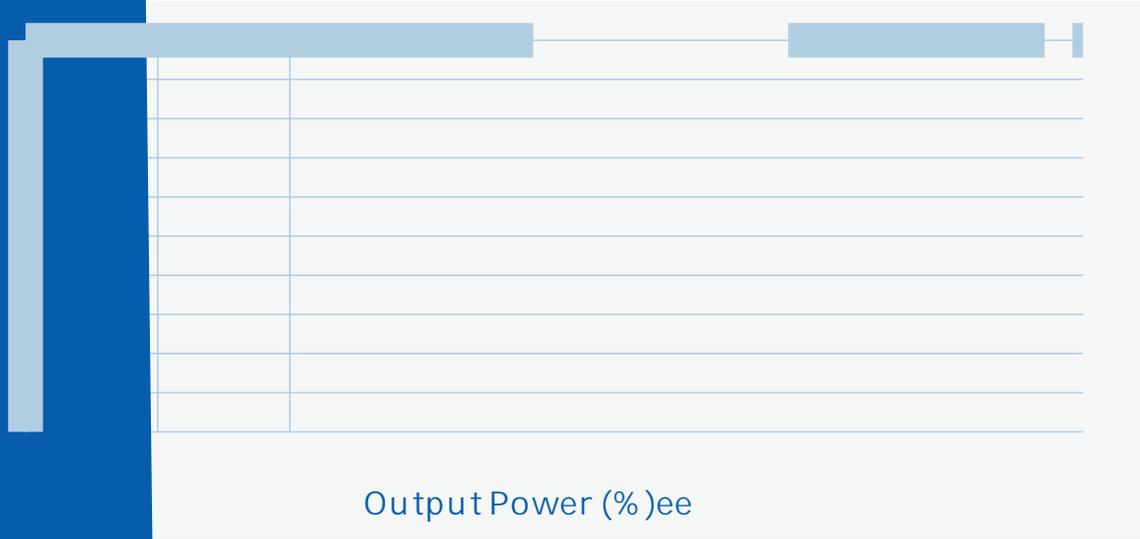


— · — · — Vin=120Vac — Vin=220Vac - · - · - Vin=347Vac


— · — · — Vin=120Vac — Vin=220Vac - · - · - Vin=347Vac




Vs.

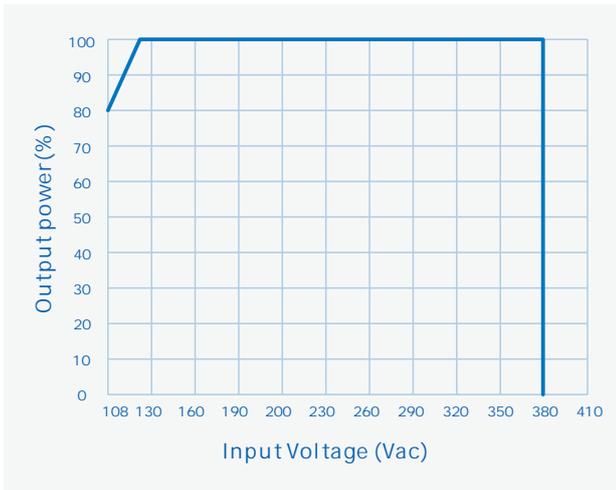


Vs.

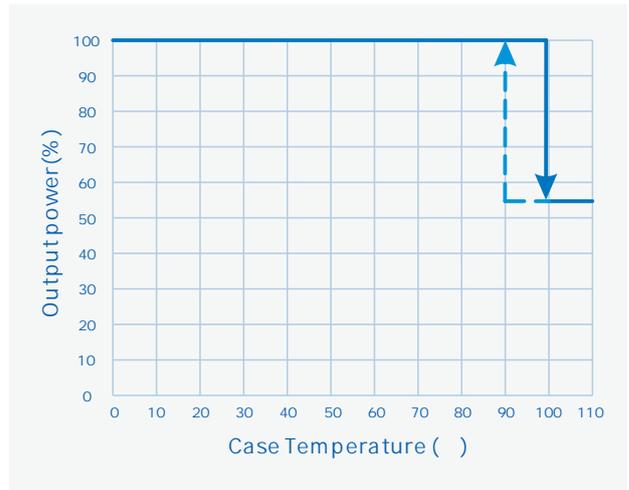

Vs.

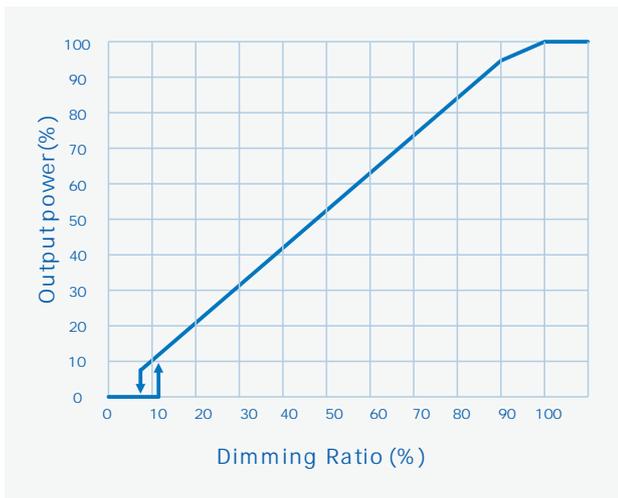


Vs.

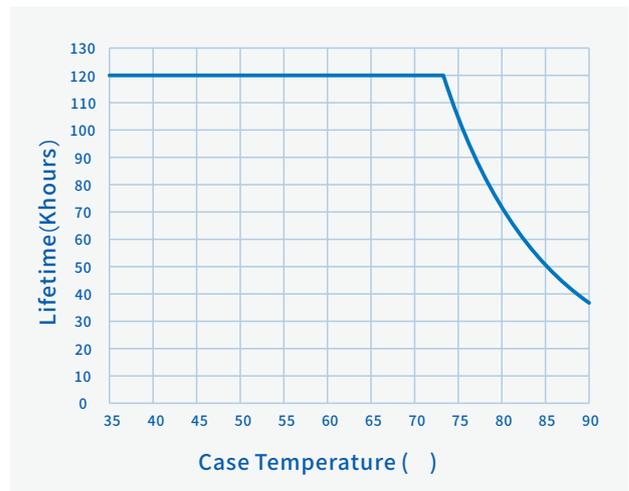



		mm (In.)
	A	13(0.51)
	4-B	7.0(0.28)
	D	136(5.35)
	H	62.5(2.46)
	Z	M10*1.5(18mm) G1/2(18mm)
	R	M4*0.7
	W	113(4.45)
Tc	X	10(0.39)
Tc	Y	33(1.3)

1 LED ;
 2 AC DC DIM / / :
 43± 5mm 10± 2mm;

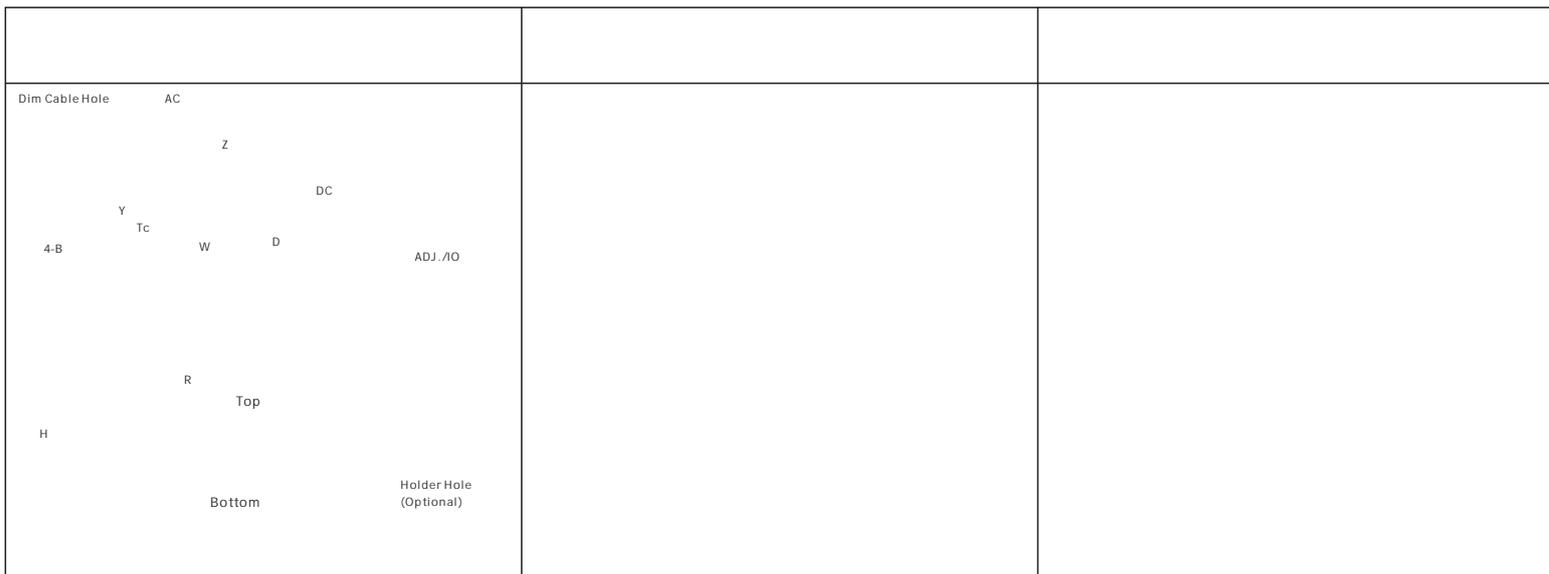



1				704
2				
3		5mm		
4	LED+	LED-	1.8mm	
5				
6	LED			
7	LED			
8		LED		

-		mm	x	x	=495x 385x 162;
-		9			
-	0.975kg			10.07kg	
-					

--	--	--	--	--

	GB 3873	83
	1	

RoHS

RoHS	(2011/65/EU)	2015/863/EU
------	--------------	-------------





V00		2023/05/25	
V01		2023/07/13	
V02		2023/08/22	
V03		2023/11/17	

